

SMART Board® 8055i and 8055i-SMP

Interactive flat panel

Installation guide

Product registration

If you register your SMART product, we'll notify you of new features and software upgrades.

Register online at smarttech.com/registration.

Keep the following information available in case you need to contact SMART Support.

Serial number:

Date of purchase:

FCC warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the US Federal Communications Commission Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the manufacturer's instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Trade-mark notice

SMART Board, SMART Notebook, SMART Meeting Pro, SMART GoWire, smarttech, the SMART logo and all SMART taglines are trade-marks or registered trade-marks of SMART Technologies ULC in the US and/or other countries. All third-party product and company names may be trade-marks of their respective owners.

Copyright notice

© 2012 SMART Technologies ULC. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form by any means without the prior written consent of SMART Technologies ULC. Information in this manual is subject to change without notice and does not represent a commitment on the part of SMART.

One or more of the following patents: US6320597; US6326954; US6563491; US6741267; US6803906; US6829372; US6947032; US6954197; US6972401; US7151533; US7236162; US7411575; US7619617; US7643006; US7692625; US7755613; US7757001; US7880720; USD612396; USD616462; USD617332; and USD636784. Other patents pending.

05/2012

Contents

Chapter 1: Installing your interactive flat panel	1
What's included	2
Components of your interactive flat panel	3
Wall-mounting your interactive flat panel	4
Chapter 2: Connecting computers and peripheral devices	7
Installing the speakers	8
Connecting a room control system	9
Connecting computers to your interactive flat panel	10
Connecting peripheral devices to your interactive flat panel	15
Chapter 3: Installing SMART software	17
Installing SMART Meeting Pro software	18
Using a SMART GoWire cable	18
Installing SMART Notebook software	20
Updating SMART Product Drivers	20
Appendix A: Hardware environmental compliance	21
Waste Electrical and Electronic Equipment regulations (WEEE directive)	21
Restriction of Certain Hazardous Substances (RoHS directive)	21
Batteries	21
Packaging	21

Chapter 1

Installing your interactive flat panel

What's included	2
Installation hardware	2
Accessories	2
Documentation	2
Components of your interactive flat panel	3
Front view	3
Back view	3
Side view	4
Wall-mounting your interactive flat panel	4
Important mounting considerations for trained installers	5
Choosing a mounting location	5
Choosing a mounting height	6

You need a team of professional installers to install your SMART Board® 8055i interactive flat panel.

This chapter provides additional considerations and details for installing your interactive flat panel.

IMPORTANT

Because the ports might not be accessible after wall-installation, consider connecting cables for speakers, computers and peripheral devices whilst the interactive flat panel is still in its packaging or is suspended from a lifting device. For more information, see *Connecting computers and peripheral devices* on page 7.

CHAPTER 1

Installing your interactive flat panel

What's included

The following items are included with your interactive flat panel.

Installation hardware

- Five large clamps (for cable management)
- Ten small clamps (for cable management)
- Power cable
- USB cable
- VGA cable

Accessories

- Two speakers with mounting screws
- Infrared remote control with two batteries
- Two pens with four replacement pen nibs
- Eraser
- SMART GoWire™ auto-launch cable (SMART Board 8055i-SMP and 8055ie-SMP interactive flat panels only)
- CAT 5 USB extender (SMART Board 8055i-SMP and 8055ie-SMP interactive flat panels only)
- SMART Notebook™ collaborative learning software DVD (SMART Board 8055i interactive flat panels only)

Documentation

- Installation guide
- Important information document
- Warranty card
- Registration card
- SMART GoWire cable installation guide (SMART Board 8055i-SMP and 8055ie-SMP interactive flat panels only)
- CAT 5 USB extender installation guide (SMART Board 8055i-SMP and 8055ie-SMP interactive flat panels only)
- SMART Board 8055i interactive flat panel cabling guide (SMART Board 8055i-SMP and 8055ie-SMP interactive flat panels only)


CHAPTER 1

Installing your interactive flat panel


Components of your interactive flat panel

The following images identify the components of your interactive flat panel.

Front view

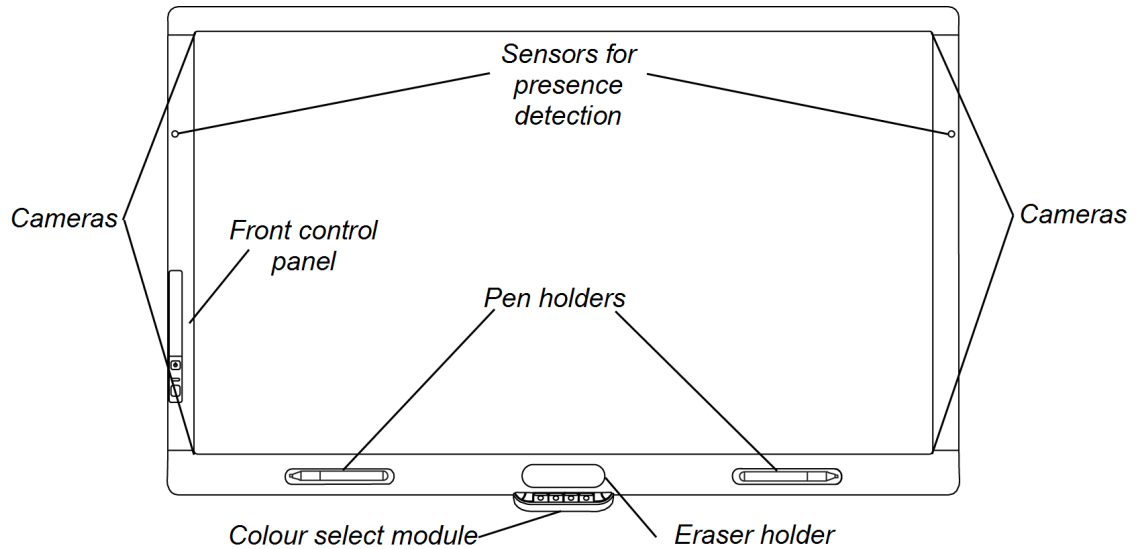

Back view

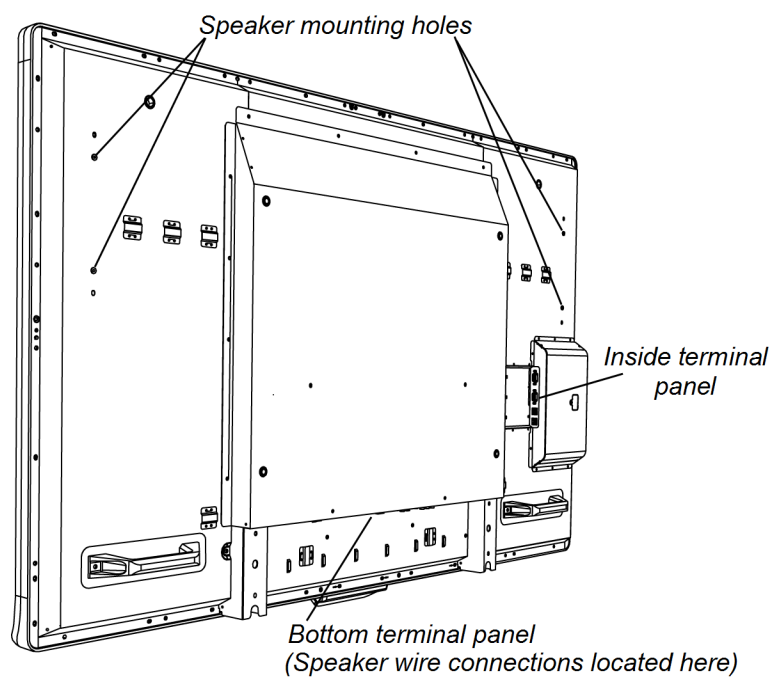


CHAPTER 1

Installing your interactive flat panel

Side view

i NOTES

- The computer connected to VGA 1 and USB 1 accesses the USB drive that's connected to the USB A port.
- To disable the USB A port, see *SMART Board 8055i interactive flat panel user's guide* (smarttech.com/kb/170177).

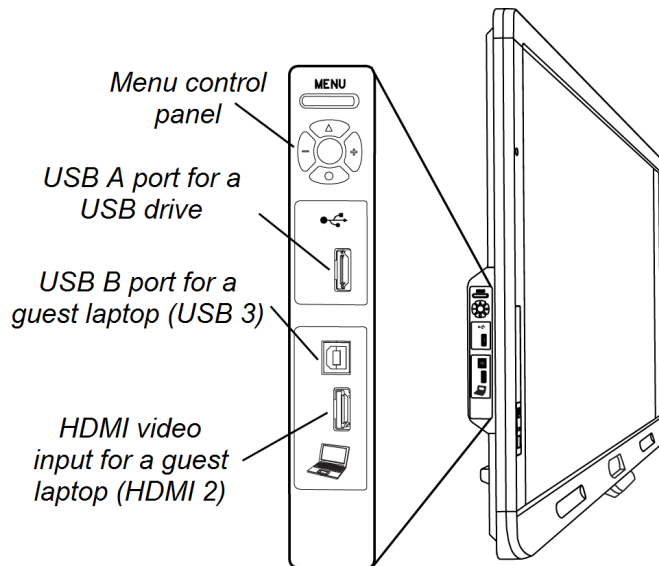

Wall-mounting your interactive flat panel

Use a team of trained, professional installers to install your interactive flat panel.

⚠ WARNING

- Improper installation can result in personal injury or product damage.
- Your interactive flat panel weighs 44.5kg (98 lb). Refer to local building regulations to ensure that your installation area can support this weight.

⚠ CAUTION

Do not allow the weight of the interactive flat panel to rest on the colour select module because it is not designed to support product weight. Attach other components whilst the interactive flat panel is either still in its packaging or suspended from a lifting device to prevent the weight of the interactive flat panel from damaging the colour select module.

👉 IMPORTANT

- Save all product packaging so that it is available if you need to transport your interactive flat panel. If your original packaging is not available, you can purchase new product

CHAPTER 1

Installing your interactive flat panel


packaging from your authorised SMART reseller (smarttech.com/where).

- Attach the speakers and connect the speaker wires to the interactive flat panel before you wall-mount it. For more information, see *Installing the speakers* on page 8.

Important mounting considerations for trained installers

Consider the following when mounting the interactive flat panel on a wall:

- Plan your workflow to include cabling because some cable connection points might not be accessible after installation.
- Carry and lift the interactive flat panel by gripping the handles and sides.

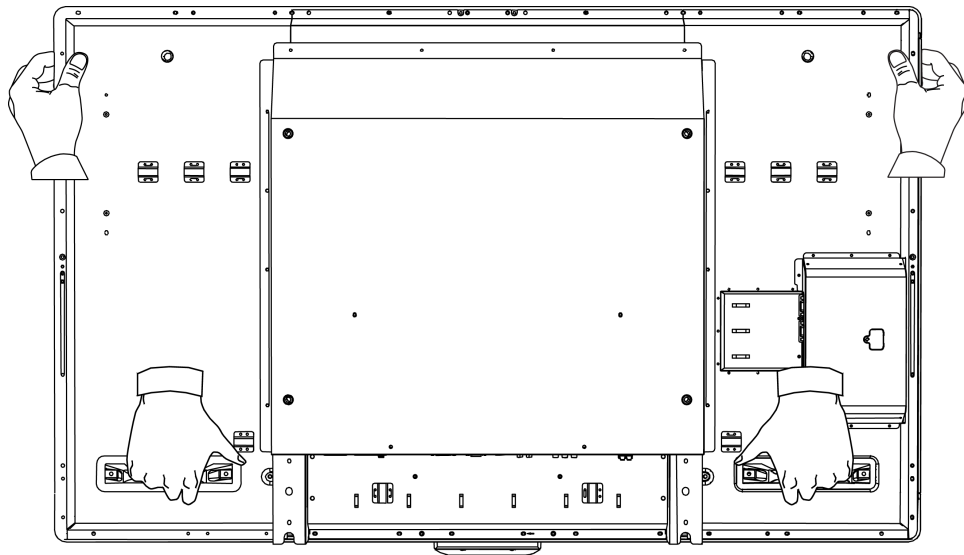

- To mount the interactive flat panel on a wall, you require a standard VESA 600 mm × 400 mm compatible wall mount bracket (not included). The wall mount bracket must have minimum depth of 14 mm to ensure sufficient space for the speakers.
- Use M8 screws to fasten the wall bracket. The screws must be 14–15 mm long plus the thickness of the bracket and the washer.
- The recommended fasten force is 11.25–13.75 N·m (99.57–121.70 in-lb.).
- Refer to the instructions included with the mounting equipment for more detailed information.

Choosing a mounting location

Consider the following when you select a location for the interactive flat panel:

- The wall must be strong enough to support the interactive flat panel and the mounting equipment. The interactive flat panel weighs 44.5kg (98lb).
- Do not install the interactive flat panel in a location where a door or gate could hit it.


CHAPTER 1

Installing your interactive flat panel

- Do not install the interactive flat panel in an area where it will be subjected to strong vibrations or dust.
- Do not install the interactive flat panel near where the main power supply enters the building.
- Ensure adequate ventilation or provide air conditioning around the interactive flat panel so that heat can flow away from the unit and the mounting equipment.
- If you mount the interactive flat panel in a recessed area, leave at least 10 cm (4") of space between the interactive flat panel and the recess walls to enable ventilation and cooling.

Choosing a mounting height

Consider the general height of your user community when you choose the mounting height for the interactive flat panel.

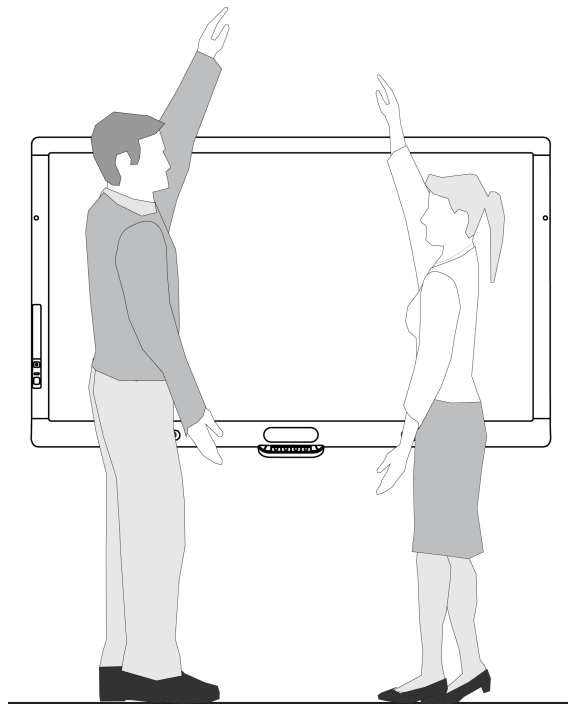

Chapter 2

Connecting computers and peripheral devices

Installing the speakers	8
Connecting a room control system	9
Connecting computers to your interactive flat panel	10
Connecting to power and computer 1	11
Setting up the computer 2 connection location	12
Connecting a guest laptop	13
Connecting peripheral devices to your interactive flat panel	15
Bottom terminal panel	15

This chapter includes information on connecting your interactive flat panel to computers and other peripheral devices.




IMPORTANT

Because the cable connection points might not be accessible after wall-mounting, consider connecting these devices before wall-mounting your interactive flat panel.


Installing the speakers

Your interactive flat panel comes with two 15 W speakers.

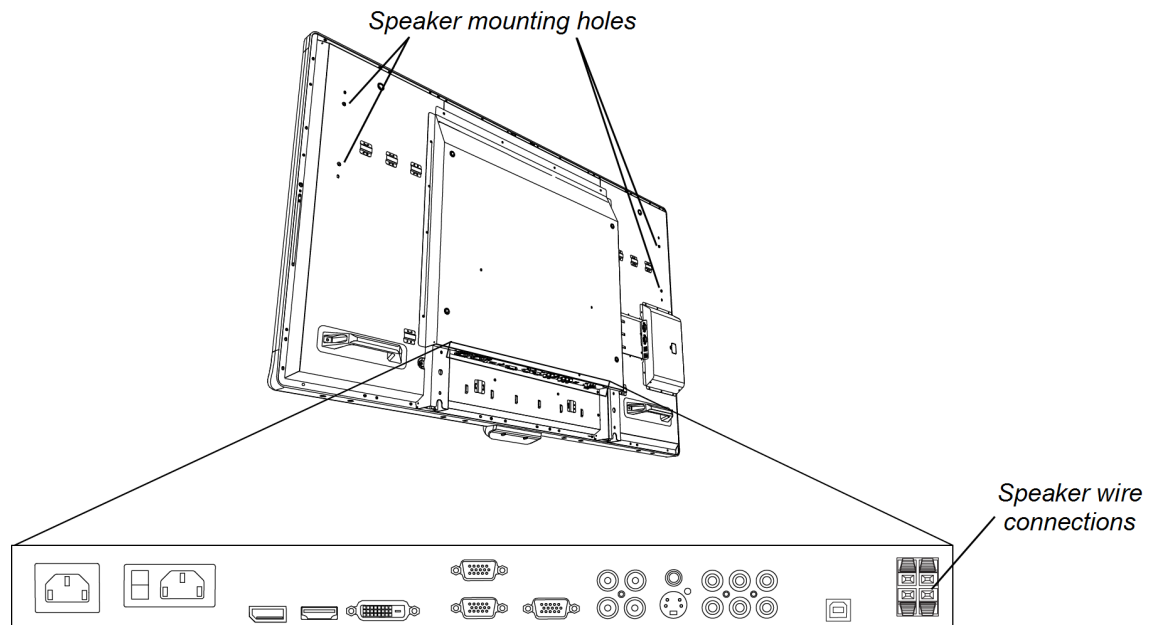

To install the speakers

1. Attach the speakers to the speaker mounting holes on the side of the interactive flat panel with the screws included.
2. Connect the speaker wires to the speaker wire connections on the bottom terminal panel.
3. Run the speaker wire for the left speaker (when viewed from the back of the interactive flat panel) below the bottom terminal panel and secure it with the small clamps included.

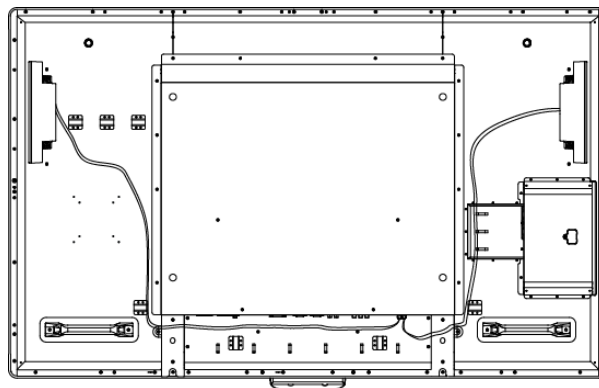

Connecting a room control system


You can control your interactive flat panel from a room control system.

To connect your interactive flat panel to a room control system

Connect an RS-232 cable from the room control input on the inside terminal panel of the interactive flat panel to the serial output on your computer or room control system.

IMPORTANT

Do not use a null modem cable. Use only a standard RS-232 cable.

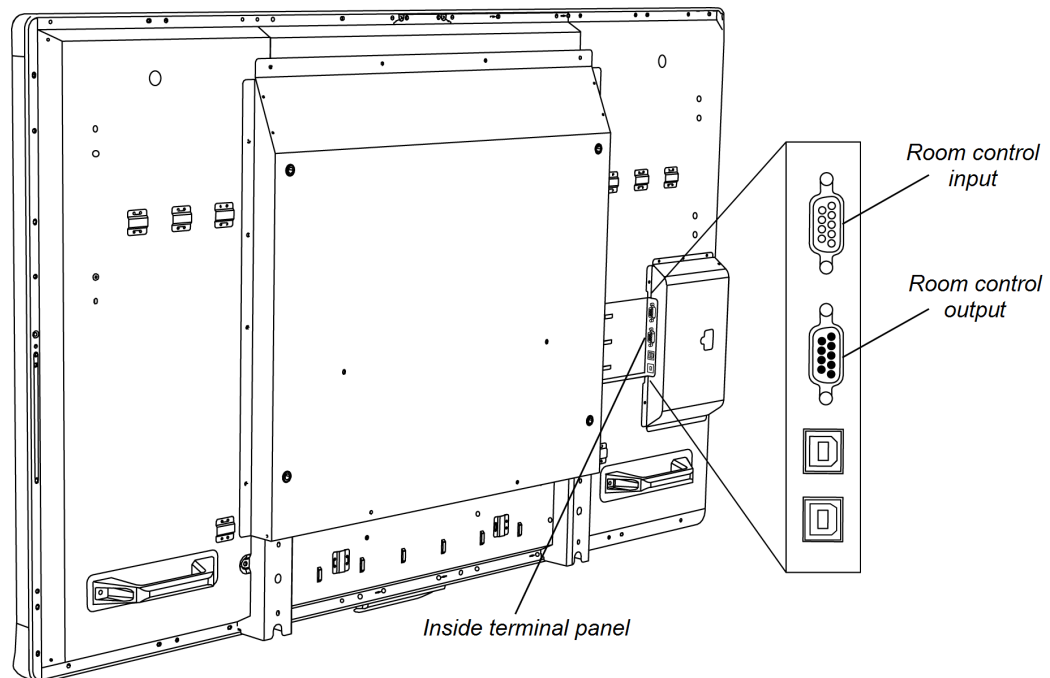

For more information about setting up and programming a room control system, see *Remotely managing your SMART Board 8055i interactive flat panel* (smarttech.com/kb/170189).


Connecting computers to your interactive flat panel

You can connect up to three computers simultaneously to your interactive flat panel:

- Computer 1 (an installed room computer) connected to USB 1 and VGA 1
- Computer 2 (a guest computer) connected to USB 2 and VGA 2
- A guest laptop connected to USB 3 and HDMI 2 connector

i NOTE

This document describes the default USB and video connections. To customise the USB and video mapping, see *Configuring the video and touch input for your SMART Board 8055i interactive flat panel* (smarttech.com/kb/170190).

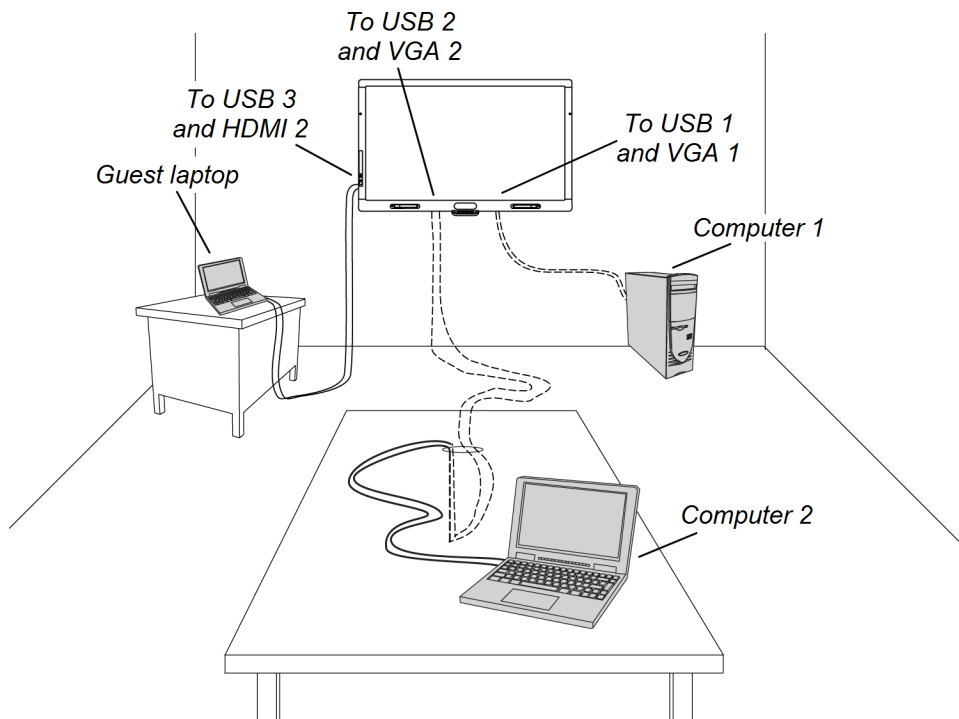


Connect video cables to the bottom terminal panel and connect USB cables to the inside terminal panel.

To further secure the video cables to the bottom terminal panel, use the large clamps included.


CHAPTER 2

Connecting computers and peripheral devices


Connecting to power and computer 1

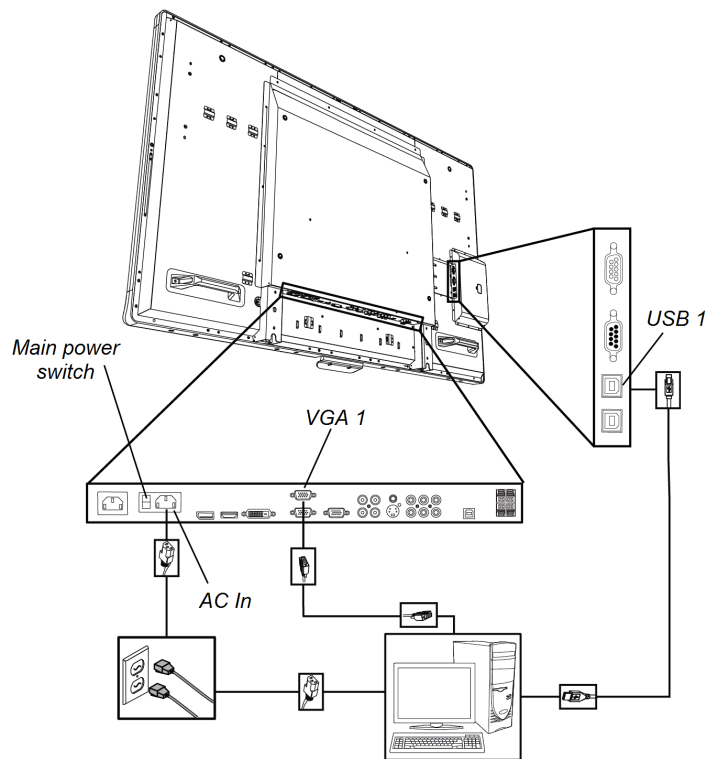

To connect your interactive flat panel to power and computer 1

1. Connect the VGA cable included from your computer to the VGA 1 connector on the bottom terminal panel.
2. Connect the USB cable included from the USB 1 port on the inside terminal panel to a USB port on the computer.
3. Connect the power cable included from the AC In connector on the bottom terminal panel to a power socket.
4. Connect the power cable from your computer to a power socket.
5. Turn on your computer.
6. Turn on the main power switch on the bottom terminal panel, and then press the **Power** button  on the front control panel.
7. Press the **VGA 1** button on the remote control.

OR

Press the **Input** button  on the front control panel until the source is VGA 1.


8. Acknowledge the welcome screen by touching the screen or by pressing any key on computer 1's keyboard

CHAPTER 2

Connecting computers and peripheral devices

Setting up the computer 2 connection location

You can set up cabling that enables you to connect a second computer to your interactive flat panel from another location in the room such as on a conference table. By setting up this connection location, you make use of connection points that might not be accessible when your interactive flat panel is wall-mounted.

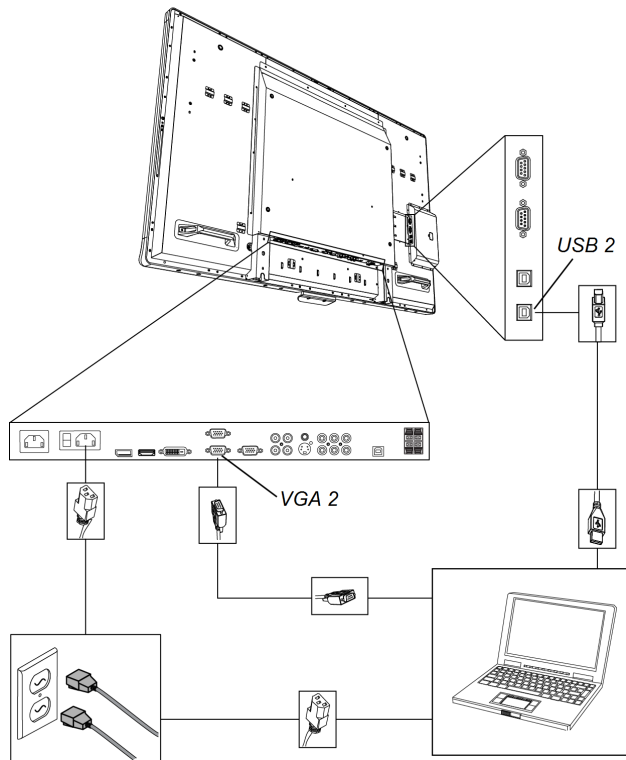

You require a USB cable and a VGA cable to set up the computer 2 connection location.

WARNING

Ensure that any cables extending across the floor to your SMART product are properly bundled and marked to avoid a trip hazard.

To set up a computer 2 connection location

1. Connect a USB cable to the USB 2 port on the inside terminal panel, and then run the cable to the computer 2 connection location.
2. Connect a VGA video cable to the VGA 2 port on the bottom terminal panel, and then run the VGA Out end of the cable to the remote connection location.
3. Bundle and cover the cables as appropriate.


CHAPTER 2

Connecting computers and peripheral devices

■ To connect a computer to the computer 2 connection location

1. Place the computer beside the end of the wire bundle at the computer 2 connection location.
2. Connect the USB cable to the computer.
3. Connect the VGA cable to the computer.
4. Turn on the computer.
5. Press the **VGA 2** button on the remote control.


OR

Press the **Input** button  on the front control panel until the source is VGA 2.

■ To return to using computer 1


Press the **VGA 1** button on the remote control.

OR

Press the **Input** button  on the front control panel until the source is VGA 1.

Connecting a guest laptop

You can connect a guest laptop to the side terminal panel of the interactive flat panel. This enables you to have touch control of the computer's desktop from the interactive flat panel.

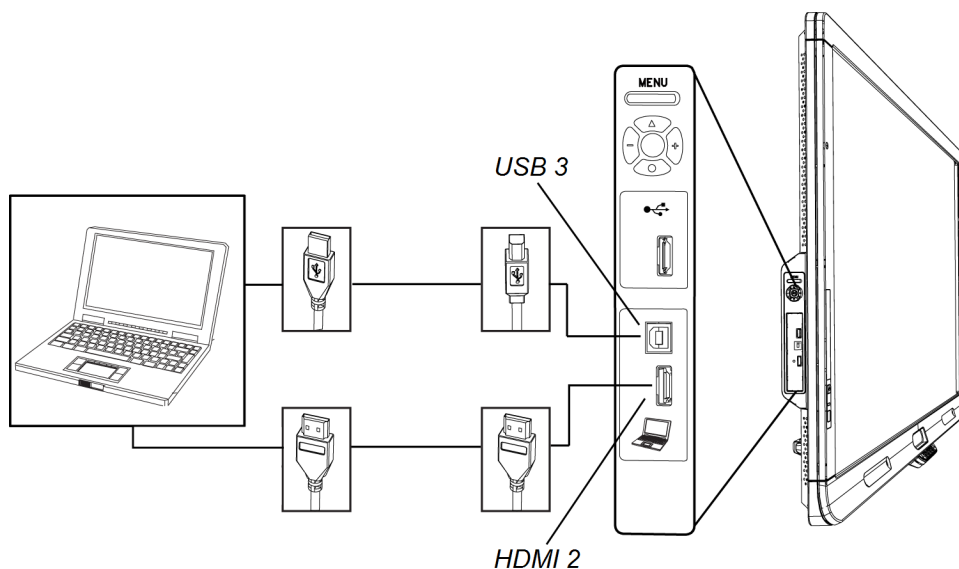

CHAPTER 2

Connecting computers and peripheral devices

■ To connect a guest laptop

1. Connect an HDMI cable from the guest laptop to the side terminal panel.
2. Connect a USB cable from the guest laptop to the USB 3 connection on the side terminal panel.




IMPORTANT

Do not connect the guest laptop to the USB A port as this port is for USB drives only.

3. Turn on the laptop.
4. Press the **HDMI 2** button on the remote control.


OR

Press the **Input button**  on the front control panel until the source is HDMI 2.

■ To return to using computer 1

Press the **VGA 1** button on the remote control.

OR

Press the **Input button**  on the front control panel until the source is VGA 1.


Connecting peripheral devices to your interactive flat panel

Connect peripheral devices to the bottom terminal panel.

CAUTION

The AC power socket is designated for a component of the SMART Board 8055ie-SMP interactive flat panel with appliance. See *Replacing the appliance on your SMART product (FRU - Appliance - SB8)* (smarttech.com/kb/170062).

Bottom terminal panel

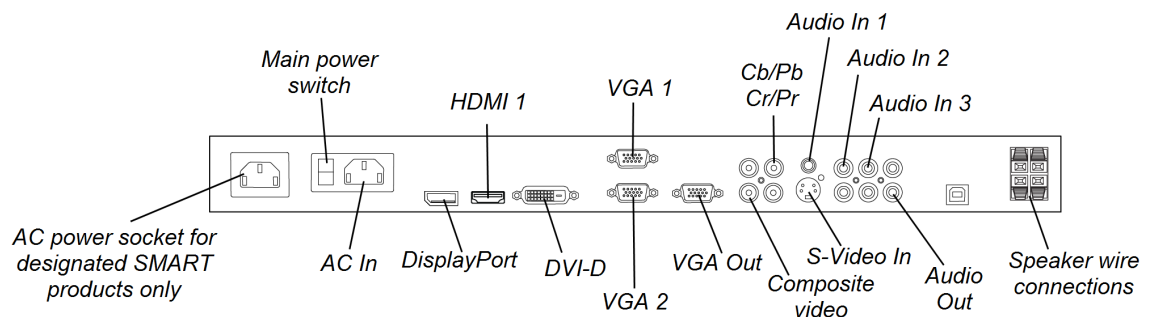

To connect a peripheral device

1. Turn off the interactive flat panel and the peripheral device.
2. Connect the peripheral device's input cables to the appropriate connectors on the bottom terminal panel.

NOTE

You can secure these cables with the large clamps included.

3. Turn on the interactive flat panel and then turn on the peripheral device.

Chapter 3

Installing SMART software

Installing SMART Meeting Pro software	18
Using a SMART GoWire cable	18
Installing SMART Notebook software	20
Updating SMART Product Drivers	20



IMPORTANT

If you already have SMART Meeting Pro™ software or SMART Notebook™ collaborative learning software installed on your computer, ensure that your computer has SMART Product Drivers 11 or later installed. For more information, see *Updating SMART Product Drivers* on page 20.

You need to install SMART software on the computer that's connected to your interactive flat panel in order to use the interactive flat panel. You can install either SMART Meeting Pro software or SMART Notebook software.

SMART Board 8055i-SMP interactive flat panels also include a SMART GoWire auto-launch cable that provides the features of SMART Meeting Pro software without installing the software on your computer. For more information about using the SMART GoWire auto-launch cable, see *Using a SMART GoWire cable* on the next page.



NOTE

For laptops that are only occasionally used for your interactive flat panel, you can use a SMART GoWire cable instead of installing SMART Meeting Pro software.

Once you install SMART Notebook software or SMART Meeting Pro software on the computer that's connected to your interactive flat panel, you have touch control of that computer's desktop. You can open files, move icons and write or erase digital ink using the pens and eraser included.

For more information, see the *SMART Board 8055i interactive flat panel user's guide* (smarttech.com/kb/170177)

Installing SMART Meeting Pro software

You can download and install SMART Meeting Pro software from the SMART website.


IMPORTANT

Connect to the Internet before you install SMART software so that you can obtain a software product key and download software updates from smarttech.com/registration.

To download SMART Meeting Pro software

1. Go to smarttech.com/downloads.
2. Click the **SMART Meeting Pro software** link.
3. Click **Choose a version** and then select the version that you require.
4. Follow the on-screen instructions to save the executable file to your desktop.

To install SMART Meeting Pro software

1. Double-click the executable file.
2. Follow the on-screen instructions. You'll be prompted to enter your product key.
3. Click the **SMART Meeting Pro** icon  in the notification area and then select **SMART Settings > About Software and Product Support > Tools > Check for Updates and Activation**.

The *SMART Product Update* window appears.

4. Follow the on-screen instructions to update your SMART Meeting Pro software to the latest version.

Using a SMART GoWire cable

Any computer connected to your interactive flat panel requires SMART software. Typically, you install this software on your room computer so that it's always ready to use.

However, if you want to connect a laptop that doesn't have SMART software installed, you can connect a SMART GoWire cable from the laptop to the USB cable for your interactive flat panel. The SMART GoWire cable enables you to have touch control of your laptop and use SMART Meeting Pro software without installing the software on your laptop.

A SMART GoWire cable is included with SMART Board 8055i-SMP and 8055ie-SMP interactive flat panels.

IMPORTANT

Your interactive flat panel supports the SMART GoWire cable with SMART Meeting Pro software only. It does not support the SMART GoWire cable with SMART Notebook software.

To use a SMART GoWire cable

1. Connect a video cable from your interactive flat panel to your laptop.
2. Connect the USB cable from the USB port on your interactive flat panel to your laptop.
3. Change the video input to your laptop's video connection using the remote control or the front control panel.
4. Disconnect the USB cable from your laptop and then connect it to the SMART GoWire cable's USB A port.



IMPORTANT

If the SMART GoWire cable is not connected to your interactive flat panel through a USB cable, you have access to SMART Meeting Pro software on your laptop for five minutes, and then the software closes.

5. Connect the SMART GoWire cable's USB connector to your laptop.

The *AutoPlay* dialogue box appears.

6. Select **Start SMART Meeting Pro**.

SMART Meeting Pro software starts. You have touch control of your laptop on your interactive flat panel and can use SMART Meeting Pro software while your laptop is connected to your interactive flat panel.


To disconnect a SMART GoWire cable

1. If required, save your SMART Meeting Pro software file to your laptop. You can save the file as a .ppt, .pdf or .notebook file.



IMPORTANT

You can open a .notebook file on a computer that has SMART Meeting Pro software or SMART Notebook software installed or that is connected to a SMART product through a SMART GoWire cable only.

2. Press the **SMART Meeting Pro** icon  in the notification area and then select **Exit**.
3. Disconnect the SMART GoWire cable from your laptop and the USB cable.


Installing SMART Notebook software

Install SMART Notebook software from the included DVD (SMART Board 8055i interactive flat panels only) or from smarttech.com/downloads.

IMPORTANT

Connect to the Internet before you install SMART software so that you can obtain a software product key (smarttech.com/registration) and download software updates.



To install SMART Notebook software

1. Place the software DVD included in your computer's DVD tray.
The installation wizard appears.
2. Follow the on-screen instructions. You'll be prompted to enter your product key. You can register your interactive flat panel at smarttech.com/registration to receive your product key.
3. Click the **SMART Board** icon  in the notification area (Windows operating systems) or the Dock (Mac OS X operating system software) and then select **Check for Updates and Activation**.
The *SMART Product Update* window appears.
4. Follow the on-screen instructions to update your SMART Notebook software to the latest version.

Updating SMART Product Drivers

To use touch control and digital ink on your interactive flat panel, you require SMART Product Drivers 11 or later on your computer.

To update SMART Product Drivers

1. Click the **SMART Board** icon  in the notification area (Windows operating systems) or the Dock (Mac OS X operating system software) and then select **Check for Updates and Activation**.
OR
Click the **SMART Meeting Pro** icon  in the notification area and then select **Check for Updates and Activation**.
The *SMART Product Update* window appears.
2. If your version of SMART Product Drivers is up to date, click **OK**.
If your version of SMART Product Drivers needs to be updated, click **Update**.
3. Follow the on-screen instructions to update SMART Product Drivers to the latest version.

Appendix A

Hardware environmental compliance

SMART Technologies supports global efforts to ensure that electronic equipment is manufactured, sold and disposed of in a safe and environmentally friendly manner.

Waste Electrical and Electronic Equipment regulations (WEEE directive)

Electrical and electronic equipment and batteries contain substances that can be harmful to the environment and to human health. The crossed-out wheelie bin symbol indicates that products should be disposed of in the appropriate recycling stream and not as regular waste.

Restriction of Certain Hazardous Substances (RoHS directive)

This product meets the requirements of the European Union's Restriction of Certain Hazardous Substances (RoHS) directive 2011/65/EU.

Consequently, this product also complies with other regulations that have arisen in various geographical areas and that reference the European Union's RoHS directive.

Batteries

The remote contains a CR 2025 lithium battery. Recycle or dispose of batteries properly.

Perchlorate Material

Contains perchlorate material. Special handling may apply. See dtsc.ca.gov/hazardouswaste/perchlorate.

Packaging

Many countries have regulations restricting the use of certain heavy metals in product packaging. The packaging used by SMART Technologies to ship products complies with applicable packaging laws.

SMART Technologies

smarttech.com/support

smarttech.com/contactsupport

1013787 Rev 02

