

Table Stand for the SMART Board™ 640 Interactive Whiteboard

Specifications – Model TS640

Physical Specifications

Size (Open)	14" W × 27" H × 1 7/8" D (35.6 cm × 68.6 cm × 4.8 cm)
Size (Closed)	33 5/8" × 1 5/8" H × 1 7/8" D (85.4 cm × 4.3 cm × 4.8 cm)
Weight of Two Brackets	8 lb. (3.6 kg)
Shipping Weight	10 lb. (4.5 kg)
Shipping Size	36" W × 5" H × 3" D (91.4 cm × 12.7 cm × 7.6 cm)




Table stand shown with the model 640 interactive whiteboard (not included)

All dimensions +/- 1/8" (3.2 mm). All weights +/- 2 lb. (0.9 kg).


Standard Features

Construction	Powder coated aluminum. Anti-skid rubber feet protect the table surface from scratches.
Assembly	Mounts to a SMART Board™ 640 interactive whiteboard with thumbscrews. No tools are required.
Storage	Fits in the CB6 or CBJ-640 carrying bags or the HSCJ-640 hard shipping case.

SMART Order Number

TS640	Table stand for the SMART Board 640 interactive whiteboard
CB6	Firm sided carrying bag for the model 640 interactive whiteboard (not included) and the model TS640 table stand (not included)
CBJ-640	Padded carrying bag for the model 640 interactive whiteboard (not included) and the model TS640 table stand (not included)
HSCJ-640	Hard shipping case for the model 640 interactive whiteboard (not included) and the model TS640 table stand (not included)
SB640CT	SMART Board 640 interactive whiteboard, TS640 table stand and CB6 firm sided carrying bag

Dimensions

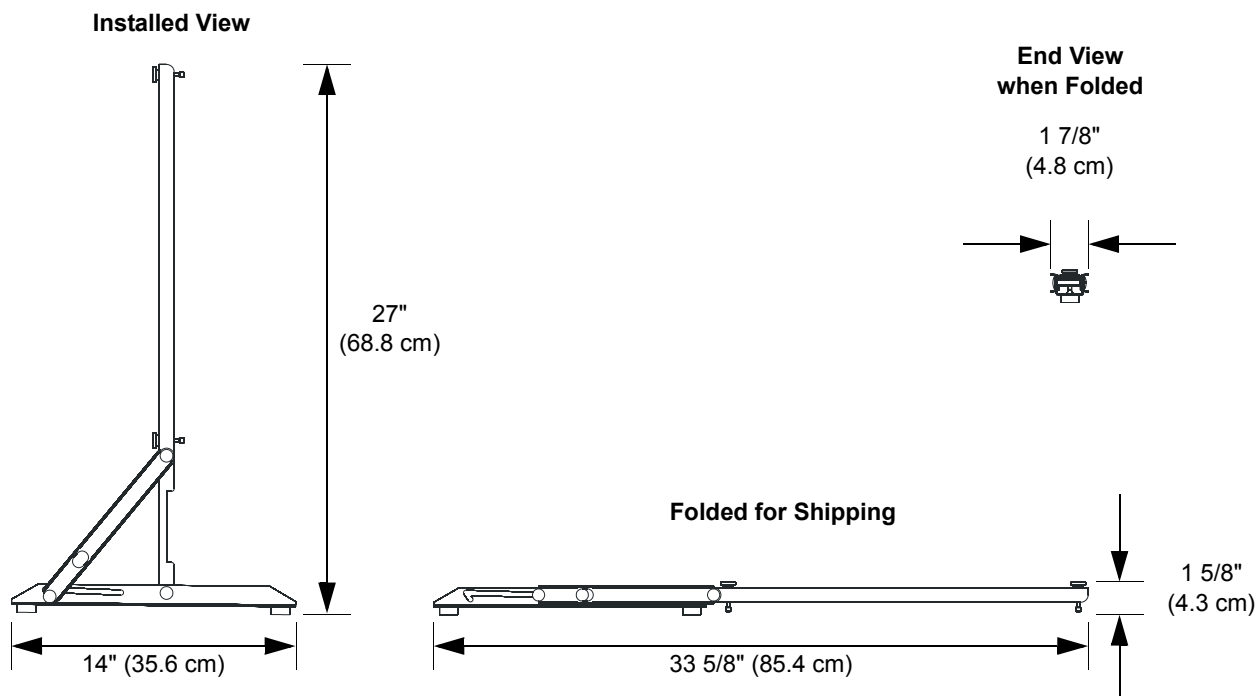

SMART Technologies
1207 – 11 Avenue SW, Suite 300
Calgary, AB T3C 0M5
CANADA

SMART
Technologies

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228-5940 or Toll Free 1.866.518.6791 (Canada/U.S.)

© 2006-2007 SMART Technologies ULC. All rights reserved. SMART Board, smarttech and the SMART logo are registered trademarks or trademarks of SMART Technologies ULC in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6326954; US6337681; US6741267; US6747636; US7151533; and CA2058219. Other patents pending. Specifications are subject to change without notice. 11/2007.