


# Senteo™ Interactive Response System

## Specifications – Receiver and Clicker

### Physical Specifications

<b>Receiver Size</b>	4 3/4" W × 7/8" H × 2 1/4" D (12 cm × 2.2 cm × 5.7 cm)
<b>Receiver Weight</b>	5 3/4 oz. (165 g)
<b>Clicker Size</b>	2 1/4" W × 5 5/8" H × 1 1/8" D (5.7 cm × 14.2 cm × 2.5 cm)
<b>Clicker Weight</b>	7 1/4 oz. (100 g) without batteries
<b>Shipping Weight</b>	24 clicker set – 12 lb. (5.4 kg) 32 clicker set – 14 lb. (6.3 kg)
<b>Shipping Size</b>	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)

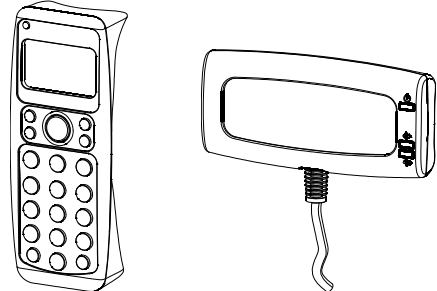

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

### Standard Features

<b>Software</b>	Senteo™ assessment software version 2.0, including SMART Notebook 10 for Windows® and Mac computers, is included on CD. Software upgrades are available at <a href="http://smarttech.com/software">smarttech.com/software</a> .
<b>Technology</b>	RF 802.15.4
<b>Radio Frequency</b>	2.40 GHz to 2.50 GHz ISM band
<b>Capacity</b>	Supports up to 60 clickers with Model 1.1.3 receiver, and up to 40 clickers with Model 1.0.19 receiver.

### Receiver Features

<b>Transmission Power</b>	0 dBm with a typical range of 100' (30 m)
<b>Antenna</b>	Integrated antenna
<b>Host Interface</b>	USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable
<b>LED Indicators</b>	Red and green LEDs indicate transmit and receive traffic and link status.
<b>Configuration</b>	Plug and play (Senteo assessment software required)

### Clicker Features

<b>Transmission Power</b>	0 dBm with a typical range of 100' (30 m)
<b>Antenna</b>	Integrated antenna
<b>LCD Display</b>	1" H × 1 5/8" W (24.6 mm × 41.6 mm), 100° viewing angle and a contrast ratio of 30:1
<b>Key Pad</b>	Buttons include: numbers 0–9, letters A–J, TRUE (T), FALSE (F), YES (Y), NO (N), QUESTION MARK (?), PLUS/MINUS (±), FORWARD SLASH (/), UP, DOWN, DELETE, MENU, POWER
<b>Configuration</b>	Plug and play (no additional software required)
<b>Batteries</b>	2 × AA Alkaline
<b>Certifications and Compliance</b>	CSA (Canada/U.S.), IC (Industry Canada), C-Tick, VCCI, CE, FCC, RoHS (Europe), WEEE
<b>Warranty</b>	Two-year limited equipment warranty

## Storage and Operating Specifications

<b>Operating Temperature</b>	32°F to 104°F (0°C to 40°C)
<b>Operating Humidity</b>	5% to 90% relative humidity
<b>Storage Temperature</b>	-40°F to 140°F (-40°C to 60°C)
<b>Storage Humidity</b>	5% to 90% relative humidity

## SMART Order Numbers

<b>SNT-24</b>	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD
<b>SNT-32</b>	Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 64 AA batteries, Quick Start Guide and software CD
<b>SNT-RMT-1</b>	Includes 1 clicker and 2 AA batteries
<b>SNT-RMT-5</b>	Includes 5 clickers and 10 AA batteries
<b>SNT-RCV</b>	Includes a receiver, Quick Start Guide and software CD
<b>SNT-CC</b>	Carrying case for 1 receiver and 40 clickers

## Dimensions

