


# SMART Hub

## Specifications – Model PE260

### Physical Specifications

<b>Size</b>	8 5/8" W × 10 9/16" D × 3 3/8" H (21.9 cm × 26.8 cm × 8.6 cm)
<b>Weight</b>	13.2 lb. (6 kg)
<b>Shipping Weight</b>	15.4 lb. (7 kg)
<b>Shipping Size</b>	12 3/16" W × 14 9/16" D × 9 1/16" H (31 cm × 37 cm × 23 cm)

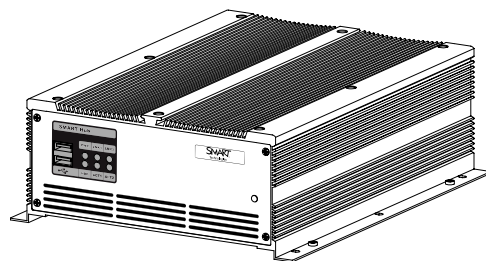

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

### Standard Features

<b>Software</b>	<ul style="list-style-type: none"><li>• Whiteboard for presenting information, writing notes and brainstorming using your SMART Board™ interactive whiteboard or other SMART interactive product</li><li>• Collaboration software for hosting and participating in online meetings</li><li>• SMART Board tools, including Screen Shade, Spotlight, Magnifier and SMART Keyboard</li><li>• Microsoft® Word, Excel and PowerPoint® viewers</li><li>• Support for up to four connected displays and SMART interactive products</li></ul>
-----------------	---

#### NOTES

- To use two, three or four displays with the SMART Hub PE260, you need to purchase an activation key for a maximum of two or a maximum of four displays.
- SMART Technologies may introduce additional features in the future.

<b>Certifications and Compliance</b>	CE, FCC, RoHS (Europe) and RoHS (China) compliant
<b>Warranty</b>	Two-year limited equipment warranty (see warranty documents included with the unit for details)
<b>Casing</b>	Heavy-duty aluminum
<b>Cooling System</b>	High efficiency cooling system with low system acoustic noise level at room temperature
<b>Mounting Options</b>	<ul style="list-style-type: none"><li>• On a wall</li><li>• On a rack</li><li>• Under a SMART Board interactive whiteboard</li></ul>
<b>Power</b>	<p>Onboard:</p> <ul style="list-style-type: none"><li>• 12V–30V DC</li></ul> <p>External power supply:</p> <ul style="list-style-type: none"><li>• 120 W AC</li><li>• Input: 100V–240V AC 2A 50–60 Hz</li><li>• Output: 19V DC 6.32A</li></ul>

## Specifications – Model PE260

### Input/Output Connections

Power connectors and status indicators:

- one DC power jack
- one two-pin connector output for remote power switch
- one power button
- six LED indicators (one for power, one for hard disk activity and four for network activity)

Display connectors:

- three VGA connectors
- one DVI-I connector
- four RS-232 connectors

SMART interactive product and peripheral connectors:

- six USB 2.0 receptacles (two on the front and four on the back)
- two PS/2 connectors (one for a mouse and one for a keyboard)
- two 3.5 mm stereo jacks (one for microphone input and one for speaker output)

Network connectors:

- two RJ45 (100BASE-T) connectors

---

### Storage and Operating Specifications

#### Storage

-4°F to 140°F (-20°C to 60°C), 10% to 93% humidity, non-condensing

#### Operating

32°F to 95°F (0°C to 35°C), 10% to 93% humidity, non-condensing


---

### SMART Order Number


#### PE260

SMART Hub PE260

## Physical Dimensions

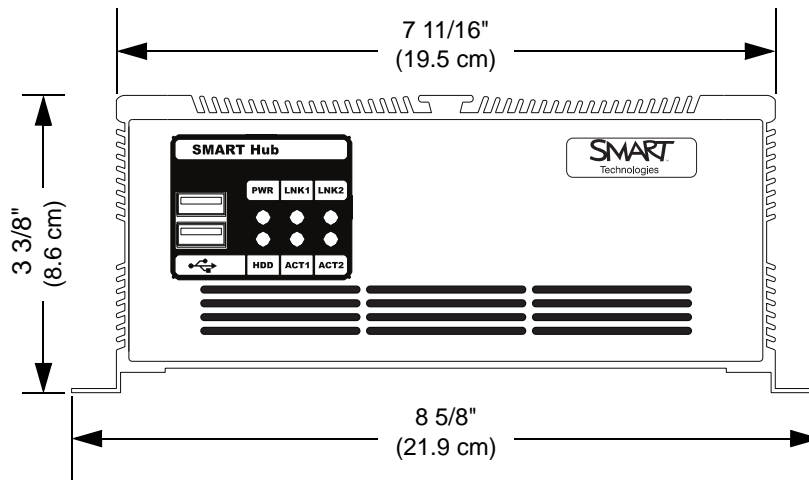

Front View

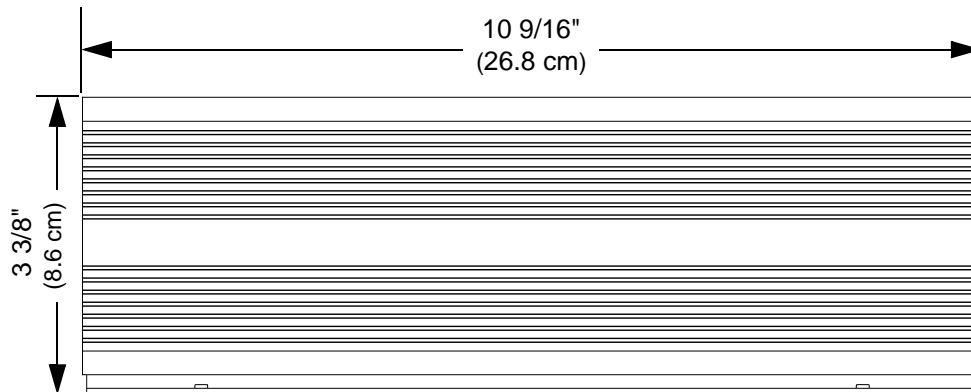

Side View