

SMART Board™ 660i3, 680i3, SBD680i3, 660i2 and 680i2 Interactive Whiteboard System Floor Stands

Specifications – Model FS600i3

Physical Specifications

Size

Free-Standing Installation 50 3/4" W × 96" H × 54 3/8" D
(128.9 cm × 243.8 cm × 138.1 cm)

Wall-Tethered Installation 50 3/4" W × 96" H × 35" D
(128.9 cm × 243.8 cm × 88.9 cm)

Weight

Free-Standing Installation 206 lb. (93.4 kg)

Wall-Tethered Installation 176 lb. (79.8 kg)


Shipping Size

Box 26 7/8" W × 8 5/16" H × 54" D
(68.3 cm × 21.1 cm × 137.2 cm)

Pallet 30" W × 5" H × 56" D
(76.2 cm × 12.7 cm × 142.2cm)

Shipping Weight

1 unit 225 lb. (102.1 kg)

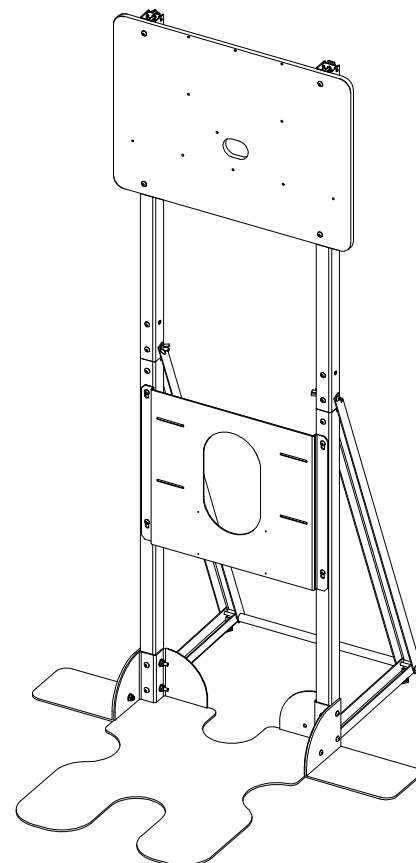

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

NOTE: See the SMART Board [660i3](#), [680i3](#), [SBD680i3](#), [660i2](#) and [680i2](#) interactive whiteboard system specifications for interactive product weights, shipping sizes and shipping weights.

Features

Stability	Two steel support flanges and a rear support structure or wall tether keep the stand in place when in use.
Mobility	Includes two attachable casters for transporting the unit when partially disassembled
Materials	Powder-coated steel and MDF plate with melamine
Installation Notes	Use the appropriate hardware for your wall type (not included) when attaching the wall tether. Two people are required to safely assemble the floor stand and install your interactive whiteboard system.
Certifications	CE, CSA
Warranty	One year, limited equipment warranty


SMART Order Numbers

FS600i3	Floor stand for SMART Board 660i3, 680i3, 660i2 and 680i2 interactive whiteboard systems
SB660i3	SMART Board 660i3 interactive whiteboard system (includes a SMART Board 660 interactive whiteboard, integrated with a UF55 projector)
SB680i3	SMART Board 680i3 interactive whiteboard system (includes a SMART Board 680 interactive whiteboard, integrated with a UF55 projector)
SBD680i3	SMART Board SBD680i3 interactive whiteboard system (includes a dual-touch SMART Board 680 interactive whiteboard, integrated with a UF55 projector)
SB660i2	SMART Board 660i2 interactive whiteboard system (includes a SMART Board 660 interactive whiteboard, integrated with a Unifi™ 45 projector)
SB680i2	SMART Board 680i2 interactive whiteboard system (includes a SMART Board 680 interactive whiteboard, integrated with a Unifi 45 projector)
SBA	USB audio system for SMART Board 600 series interactive whiteboards
RPEN	Replacement set of four pen tray pens (black, red, green and blue)
RPEN-ER	Replacement set of four pen tray pens (black, red, green and blue) and a rectangular eraser

Physical Dimensions


FS600i3 with the SMART Board 660i3 and 680i3/SBD680i3 interactive whiteboard systems (UF55 projector)

NOTE: Diagrams show the SMART Board 680i3/SBD680i3 interactive whiteboard system.

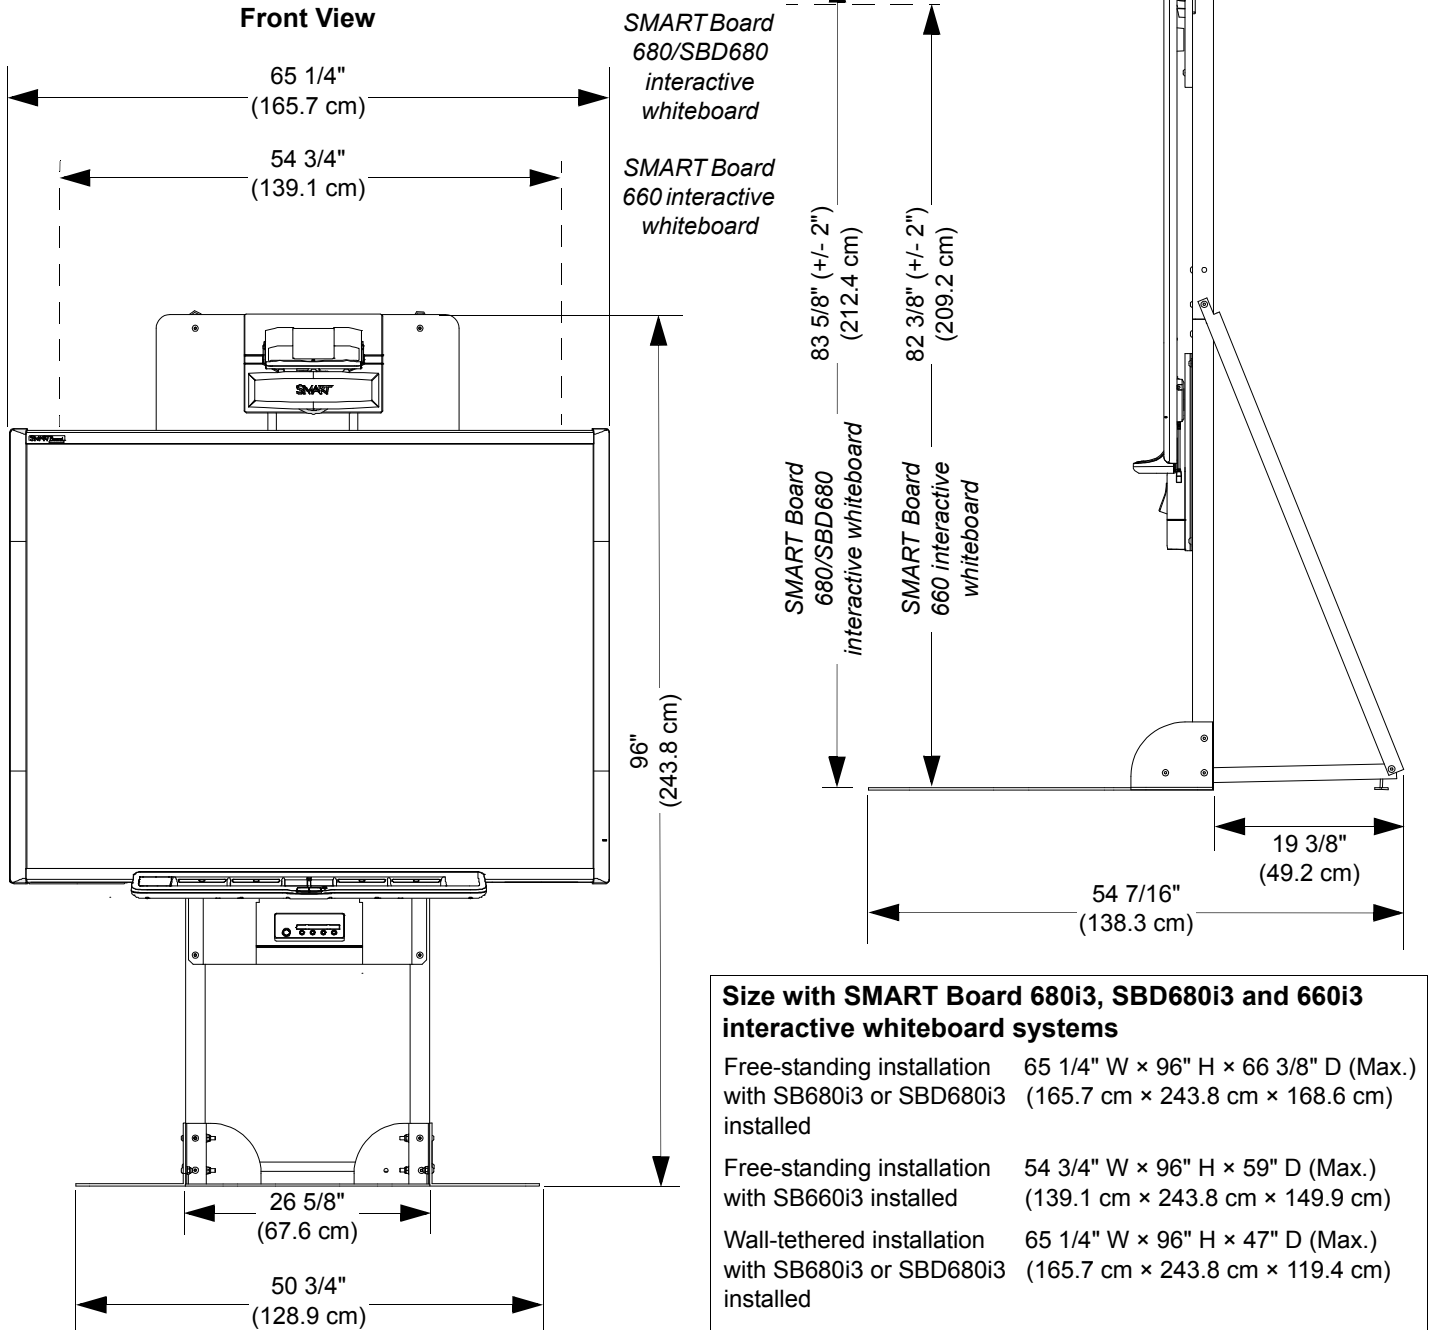

FS600i3 with the SMART Board 660i2 and 680i2 interactive whiteboard system (Unifi 45 projector)


NOTE: Diagrams show the SMART Board 680i2 interactive whiteboard system.

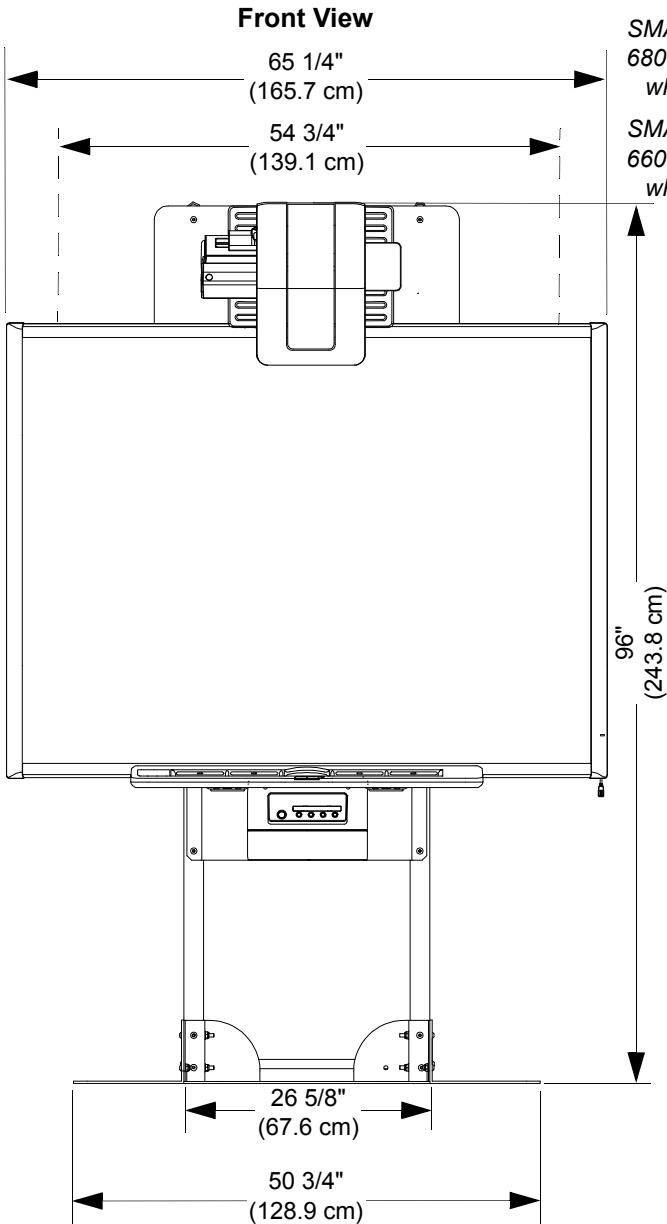

SMART Board
680 interactive
whiteboard

SMART Board
660 interactive
whiteboard

Right Side View

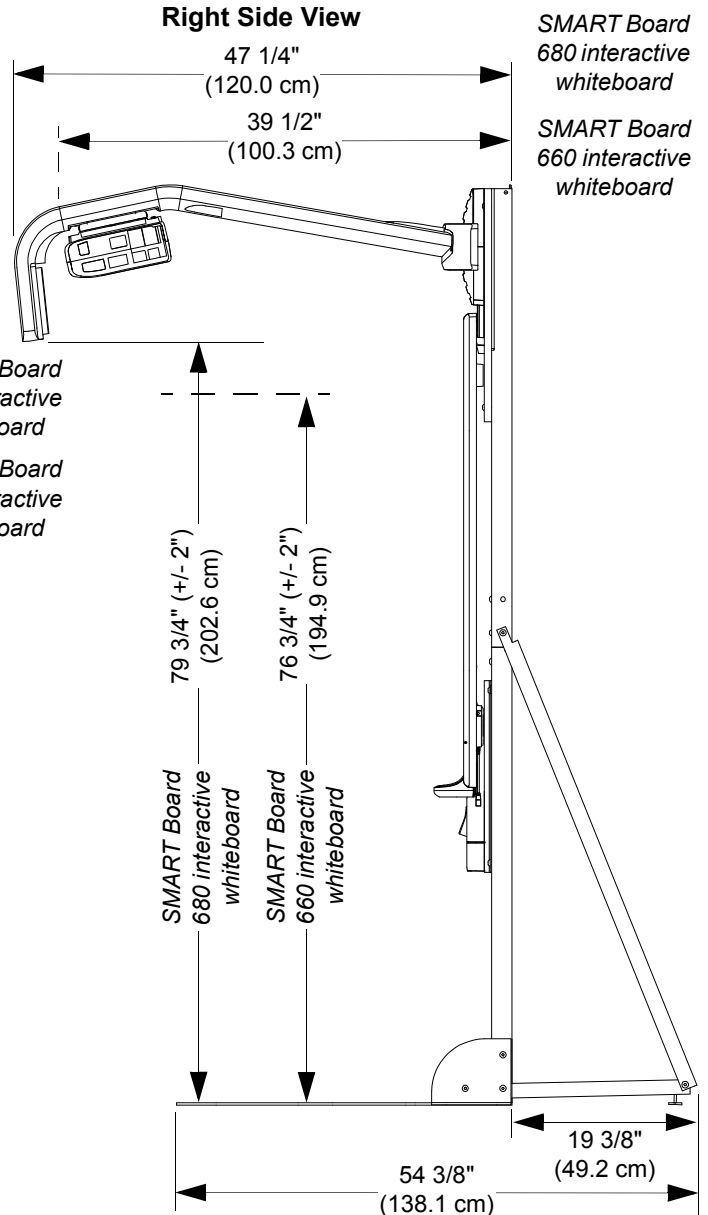

SMART Board
680 interactive
whiteboard

SMART Board
660 interactive
whiteboard

Size with SMART Board 680i2 and 660i2 interactive whiteboard systems

Free-standing installation with SB680i2 installed	65 1/4" W × 96" H × 66 5/8" D (Max.) (165.7 cm × 243.8 cm × 169.2 cm)
Free-standing installation with SB660i2 installed	54 3/4" W × 96" H × 58 7/8" D (Max.) (139.1 cm × 243.8 cm × 149.5 cm)
Wall-tethered installation with SB680i2 installed	65 1/4" W × 96" H × 47 1/4" D (Max.) (165.7 cm × 243.8 cm × 120.0 cm)
Wall-tethered installation with SB660i2 installed	54 3/4" W × 96" H × 39 1/2" D (Max.) (139.1 cm × 243.8 cm × 100.3 cm)

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228-5940 or Toll Free 1.866.518.6791 (U.S./Canada)

SMART™

© 2008–2009 SMART Technologies ULC. All rights reserved. SMART Board, Unifi, smarttech and the SMART logo are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6320597; US6326954; US6337681; US6540366; US6741267; US6747636; US7151533; US7184030; US7283126; US7289113; and CA2058219. Other patents pending. Contents are subject to change without notice. 09/2009.