# SMART Board™ 600i3, SBD600i3 and 600i2 Series Interactive Whiteboard System Height-Adjustable Wall Mount Specifications – Model HAWM-600i3

#### **Physical Specifications**

**Size** 25 3/4" W × 65 1/8" H × 7 1/4" D

(65.4 cm × 165.5 cm × 18.4 cm)

**Weight** 164.2 lb. (74.5 kg)

**Shipping Size** 65 3/8" W × 7 7/8" H × 27 1/2" D

(3 boxes)  $(166 \text{ cm} \times 20 \text{ cm} \times 70 \text{ cm})$ 

13 3/8" W × 6 1/8" H × 22" D (34 cm × 15.5 cm × 56 cm)

7 1/8" W × 6 1/8" H × 18 3/8" D (18 cm × 15.5 cm × 46.5 cm)

**Shipping Weight** 73 lb. (33 kg) (3 boxes) 61 lb. (27.7 kg)

46 lb. (20.9 kg)

**SMART Board 660 Interactive Whiteboard (not included)** 

**Size** 54 3/4" W × 41 5/8" H × 5 1/8" D


 $(139.1 \text{ cm} \times 105.7 \text{ cm} \times 13 \text{ cm})$ 

SMART Board 680 or SBD680 Interactive Whiteboard

(not included)

**Size** 65 1/4" W × 49 1/2" H × 5 1/8" D

 $(165.7 \text{ cm} \times 125.7 \text{ cm} \times 13.0 \text{ cm})$ 

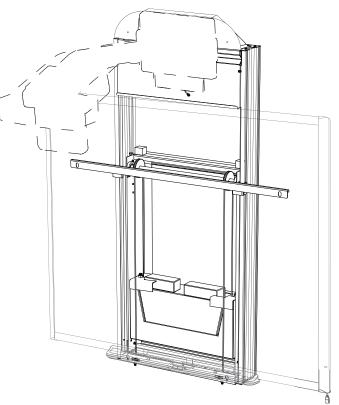

All dimensions +/- 1/8" (0.3 cm). All weights +/- 3.3 lb. (1.5 kg).

**NOTE:** See the SMART Board <u>660i3</u>, <u>680i3</u>, <u>SBD680i3</u>, <u>660i2</u> and <u>680i2</u> interactive whiteboard system specifications for interactive product order numbers, shipping sizes and weights.

## Specifications - Model HAWM-600i3

Standard Features

Vertical Travel 20" (50 cm) of vertical travel allows taller and shorter users to raise or lower your interactive

whiteboard to a convenient height

Mounting Hardware Includes mounting hardware for solid walls made of brick, cinder block or concrete

**Stud Wall Installation** To mount the unit on metal stud or wood framed walls, you must order the Stud Wall Mounting

Kit (Part No. STWL-600i). This kit includes two formed sheet metal brackets, two aluminum mounting brackets and the hardware required to install the unit on metal stud or wood-framed

walls.

**SB660i3 and SB660i2** 

Installation

To mount a SMART Board 660i3 or 660i2 interactive whiteboard system on the

height-adjustable wall mount, you must order the Adapter Plate Kit (Part No. ADPL-600i). This kit contains mounting hardware and a melamine-coated particleboard plate that covers

the counterweight assembly and provides additional weight for balance.

**Health and Safety** The sliding mechanism is completely encased in the aluminum frame for safe operation.

Two people are required to safely assemble the wall mount and to install the interactive

whiteboard system.

The combined weight of the wall mount and interactive whiteboard system is approximately 228.1 lb. (103.5 kg). Check your local building codes to ensure that your wall can support

this weight.

**Security** You can install a padlock (not included) to secure the interactive whiteboard system at its

highest position. This ensures that the system is out of reach when not in use.

Certifications and

Compliance

CSA, CE, WEEE, EU, RoHS, California RoHS, packaging laws and China's Electronic

Information Products Regulations

Warranty Two-year limited equipment warranty

#### **SMART Order Numbers**

HAWM-600i3 Height-Adjustable Wall Mount

STWL-600i Stud Wall Mounting Kit (includes two formed sheet metal brackets, two aluminum mounting

brackets and mounting hardware)

ADPL-600i Adapter Plate Kit for the SB660i3 and the SB660i2 Height-Adjustable Wall Mount (includes

adapter plate and mounting hardware)

SB660i3 SMART Board 660i3 Interactive Whiteboard System (includes a SMART Board 660 interactive

whiteboard, integrated with a UF55 projector)

SB680i3 SMART Board 680i3 Interactive Whiteboard System (includes a SMART Board 680 interactive

whiteboard, integrated with a UF55 projector)

SBD680i3 SMART Board SBD680i3 interactive whiteboard system (includes a dual-touch SMART Board

680 interactive whiteboard, integrated with a UF55 projector)

SB660i2 SMART Board 660i2 Interactive Whiteboard System (includes a SMART Board 660 interactive

whiteboard, integrated with a Unifi™ 45 projector)

SB680i2 SMART Board 680i2 Interactive Whiteboard System (includes a SMART Board 680 interactive

whiteboard, integrated with a Unifi 45 projector)

**Front View** 

### **Dimensions**

20" (50 cm) Vertical Travel 65 1/8" (165.5 cm) 0 0 19 3/4" (50.2 cm) -25 3/4" (65.4 cm)-7 1/4" (18.4 cm)



**Side View**