

Specifications


SMART Response™ PE

interactive response system

Receiver and clicker

Physical specifications

Receiver size	4 5/8" W × 7/8" H × 2 1/8" D (11.9 cm × 2.2 cm × 5.4 cm)
Receiver weight	5 3/4 oz. (165 g)
Clicker size	2 1/4" W × 5 5/8" H × 1 1/8" D (5.7 cm × 14.2 cm × 2.8 cm)
Clicker weight	7 1/4 oz. (200 g) without batteries
Shipping size	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)
Shipping weight	SRP-PE-24 – 11 lb. 14 oz. (5.4 kg) SRP-PE-32 – 14 lb. 2 oz. (6.4 kg)

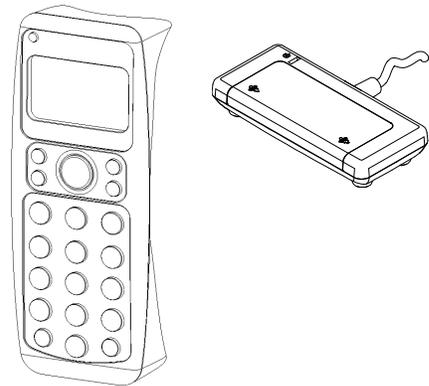

Standard features

Software	SMART Response™ 2013 assessment software DVD, which includes SMART Notebook™ collaborative learning software for Windows® and Mac computers. Software upgrades are available at smarttech.com/downloads .
Technology	RF 802.15.4
Radio frequency	2400 MHz to 2483.5 MHz ISM band
Capacity	Supports up to 100 clickers

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

SMART Response software computer requirements

Windows operating systems

- Pentium® 4 or later processor
- 2 GB of RAM
- 2.5 GB of free hard disk space (an additional 600 MB is required for complete Gallery installation)
- Windows XP SP3, Windows 7 SP1 or Windows 8 operating system
- Microsoft® .NET Framework 4 Client Profile for SMART Notebook software and SMART Ink™
- Microsoft Visual Studio® 2010 Tools for Office for SMART Ink
- Internet Explorer® Internet browser 8 or later
- Adobe® Flash® Player 11.6 or later Firefox® plug-in for SMART Notebook software and SMART Response software
- Adobe Flash Player 11.6 or later ActiveX® control for SMART Notebook software
- Adobe Reader® 8 or later
- Microsoft DirectX® technology 9 or later for SMART Notebook software

Mac OS X operating system software

- 1.5 GHz Intel® or later processor
- 2 GB of RAM
- 2 GB of free hard disk space (an additional 600 MB is required for complete Gallery installation)
- Mac OS X 10.6 to 10.8 operating system software
- Adobe Reader 8 or later
- Safari application program 4.0.2 or later
- Adobe Flash Player 11.6 or later plug-in for SMART Notebook software and SMART Response software

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

Receiver features

Transmission power	3 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
Host interface	USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable
LED indicators	Red and green LEDs indicate power status, transmit data, receive data and link status.
Configuration	Plug and play (SMART Response software required)

Clicker features

Transmission power	4.5 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD display	1 5/8" W × 1" H (41.6 mm × 24.6 mm), 100° viewing angle and a contrast ratio of 5:1
Language support	The SMART Response PE clicker is available in two models: an English/French model and a Russian/English model.
Keypad	English/French model Buttons: Alphanumeric (A–J, 0–9 and texting A–Z), True/Yes/Forward (✓), False/No/Back (X), Question (?), +/–/Shift, Fraction/Decimal/Space, Up/Down, Delete, Menu, Power Russian/English model Buttons: Alphanumeric (A–K, 0–9 and texting A–Я), True/Yes/Forward (✓), False/No/Back (X), Question (?), +/–/Shift, Fraction/Decimal/Space, Up/Down, Delete, Menu, Power
Configuration	Plug and play (no additional software required)
Batteries	2 × AA alkaline
Regulatory certification	IC (Industry Canada), C-Tick, CE, FCC, SRRC (Pending), NOM (Pending)
Environmental compliance	EU WEEE, RoHS (Europe), US CPSIA, US Packaging, China EIP
Warranty	Two-year limited equipment warranty

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

Storage and operating specifications

Operating temperature	41°F to 95°F (5°C to 35°C)
Operating humidity	5% to 85% relative humidity (non-condensing)
Storage temperature	-40°F to 131°F (-40°C to 55°C)
Storage humidity	5% to 90% relative humidity (non-condensing)

SMART order numbers

SRP-PE-24	Includes 1 receiver, 24 clickers, Phillips No. 1 screwdriver, 48 AA batteries, SMART Response Quick Start Guide and software DVD
SRP-PE-32	Includes 1 receiver, 32 clickers, Phillips No. 1 screwdriver, 64 AA batteries, SMART Response Quick Start Guide and software DVD


Optional accessories

SRP-PE-RMT-1	Includes 1 clicker and 2 AA batteries
SRP-PE-RMT-5	Includes 5 clickers and 10 AA batteries
SRP-RCV-1	Includes a receiver and software DVD
SRP-PE-CC	Carrying case for 1 receiver and 40 clickers

SPECIFICATIONS

SMART Response PE interactive response system – Receiver and clicker

Physical dimensions

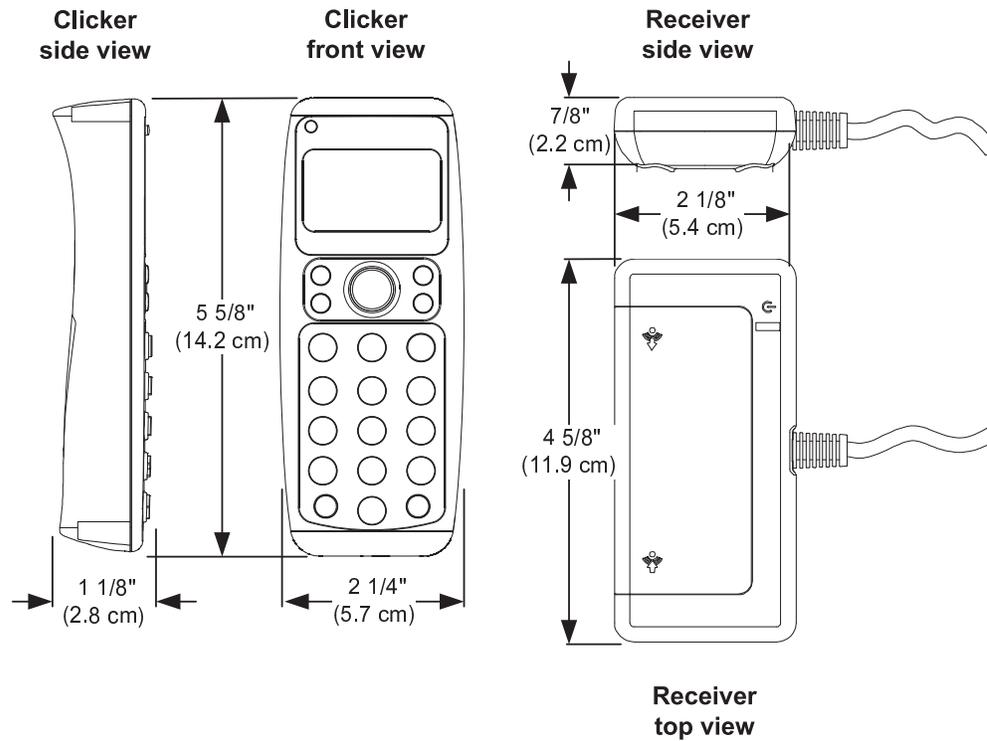

smarttech.com/support
smarttech.com/contactsupport

© 2007–2013 SMART Technologies ULC. All rights reserved. SMART Response, SMART Notebook, SMART Ink, the SMART logo, smarttech and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Microsoft, Windows, Internet Explorer, Visual Studio, ActiveX and DirectX are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Mac, Mac OS, OS X and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Adobe, Reader and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 03/2013.