


SMART Board® MX Pro series with iQ

SBID-MX255-V2-CPW SBID-MX265-V2-CPW SBID-MX275-V2-CPW SBID-MX286-V2-CPW





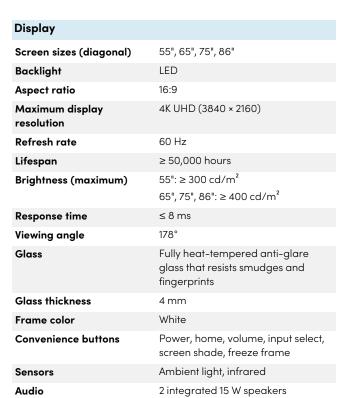

| Interactive experience | |
|-------------------------|---|
| Touch technology | HyPr Touch [™] with Advanced IR |
| Touch features | Simultaneous Tool Differentiation™ Object Awareness™ Silktouch™ |
| Frame rate | 100 Hz |
| Accuracy | ±1 mm (over 90% area) |
| Minimum object size | 3 mm |
| Multitouch capabilities | 20 – Windows® and Mac 10 – Chrome OS™ |
| Tools included | Pens (×2) |
| Tool holders | Magnetic, frame-mounted |

| Software | |
|--|--|
| iQ built-in Android™ experience | Included |
| SMART Meeting Pro® Room license | Included |
| SMART Meeting Pro Personal licenses (×10) | Included |
| SMART Ink® and SMART Product Drivers | Included |
| SMART Remote Management | Subscription for length of the included warranty |

smarttech.com smarttech.com/contact

© 2022 SMART Technologies ULC. All rights reserved. SMART Board, SMART Meeting Pro, SMART TeamWorks, SMART Ink, HyPr Touch, Simultaneous Tool Differentiation, Object Awareness, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. February 3, 2022.

smarttech.com/kb/171740

| iQ built-in Android exper | ience |
|---|--|
| Operating system | Android version 8.0 |
| Memory | 4 GB DDR |
| Storage | 32 GB |
| Digital whiteboard | ✓ |
| Web browser | ✓ |
| Screen sharing | / |
| Other features | SMART Whiteboard Customizable home screen Live input preview File and app libraries Google Drive™ and OneDrive™ access |
| Object Awareness supported | ✓ |
| Ability to run third-party applications | ✓ |
| Cloud storage access | ✓ |
| Languages supported | Chinese (simplified), Chinese (traditional), Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovak, Slovenian, Spanish, Swedish, Ukrainian, Vietnamese, Welsh |
| Updates | Automatic over-the-air (OTA) |
| | |
| PC computing | |
| OPS support | ✓ |
| OPS-C support | ✓ |
| PC module power supported OPS | 60 W |
| Optional computing modules | SMART OPS PC with Windows 10 Pro SMART Chromebox |

| Inputs | Front | Back |
|---|-------|------|
| OPS PC accessory slot (60 W devices) | - | 1 |
| $\ensuremath{HDMI}\xspace^{\otimes}$ 2.0 with HDCP 1.4 and HDCP 2.2 support | 1 | 2 |
| VGA video | - | 1 |
| Stereo 3.5 mm | - | 1 |
| RS-232 room control (DB-9 connector) | - | 1 |
| RJ45 Ethernet (passthrough) | - | 2 |
| USB Type-C 4K @ 60Hz Display Port alternate mode, touch, and digital audio; 15 W power delivery | 1 | - |
| USB 2.0 Type-A | 2 | 1 |
| USB 3.0 Type-A | - | 1 |
| USB 3.0 Type-B | 1 | 3 |

| Outputs | Front | Back |
|--------------------------------------|-------|------|
| HDMI 2.0 with HDCP 2.2 support | | 1 |
| Stereo 3.5 mm (variable) | - | 1 |
| Audio S/PDIF (fixed) | | 1 |
| RS-232 room control (DB-9 connector) | - | 1 |

| Included cables and accessories | Qty |
|---|-----|
| Country-specific power cable | 1 |
| 16' 5" (5 m) USB cable | 1 |
| Pens | 2 |
| External dual-band 2.4 and 5 GHz antennae | 2 |
| Remote control | 1 |
| AAA batteries | 2 |
| Wall mount bracket kit | 1 |
| Illustrated installation instructions | 1 |
| Important information document | 1 |

smarttech.com/kb/171740 2

| Connectivity | |
|--------------|--|
| Wired | RJ45 (×2) 100baseT |
| Wi-Fi | IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO (both 2.4 and 5 GHz bands) supporting WEP, WPA, WPA2 PSK, and 802.1X EAP authentication protocols |
| Bluetooth | 4.2 dual mode |

| Storage and operating requirements | | |
|------------------------------------|--|--|
| Power requirements | 100V to 240V AC, 50 Hz to 60 Hz | |
| Operating temperature | 5-35°C | |
| Storage temperature | -20-60°C | |
| Humidity | 5–80% relative humidity, non-condensing | |

| Power consumption | |
|-------------------|------------|
| Typical | 55": 98 W |
| | 65": 119 W |
| | 75": 151 W |
| | 86": 167 W |
| Standby | < 0.5 W |

| Certification and compliance | | |
|------------------------------|---|--|
| US / Canada | UL, FCC, ISED, TSCA, CONEG Packaging, Proposition 65 | |
| EU / EEA / EFTA / UK | CE, UKCA, LVD, CB, EMCD, RED, REACH, RoHS, Battery, WEEE, Packaging, POP, Ecodesign | |
| Australia / New Zealand | RCM | |
| Performance standards | ENERGY STAR®, HDMI | |

| Purchasing information | |
|------------------------------------|--|
| Order number: SBID-MX255-V2-CPW | SMART Board MX055-V2-C Pro interactive display with iQ – White |
| Order number: SBID-MX265-V2-CPW | SMART Board MX065-V2-C Pro interactive display with iQ – White |
| Order number: SBID-MX275-V2-CPW | SMART Board MX075-V2-C Pro interactive display with iQ – White |
| Order number: SBID-MX286-V2-CPW | SMART Board MX086-V2-C Pro interactive display with iQ – White |
| Optional accessories | See smarttech.com/accessories |
| Warranty | |
| SMART Assure warranty | Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit smarttech.com/warranty. |
| Cable requirements | |
| HDMI | Certified premium high speed HDM (18 Gbps) |
| | Maximum length: 7 m |
| USB 2.0 | USB 2.0 certified |
| | Hi-Speed (480 Mbps) support Maximum length: 5 m |
| USB 3.0 | USB 3.0 certified |
| 030 3.0 | SuperSpeed (5 Gbps) support Maximum length: 3 m |
| USB Type-C | USB 3.2 Gen 1 certified SuperSpeed (5 Gbps) support |

Maximum length: 2 m See smarttech.com/kb/171555

smarttech.com/kb/171740 3

More information

 $^{^{1}\}mathrm{Product}$ availability may vary by region.

This product has received additional certifications not listed here.


Installation, dimensions, and weights

Notes

- All dimensions ± 0.3 cm. All weights ± 0.9 kg.
- Product ships upright.


SBID-MX255-V2-CPW

Dimensions



SBID-MX265-V2-CPW

Dimensions



Weight

34.4 kg

Shipping dimensions (including pallet)

142.3 cm × 90.4 cm × 23.5 cm

Shipping weight

51.1 kg

VESA mount

M8, 400 × 400 mm

Handles

2

Weight

46.1 kg

Shipping dimensions (including pallet)

168.5 cm × 116.2 cm × 26 cm

Shipping weight

62 kg

VESA mount

M8, 600 × 400 mm

Handles

2

smarttech.com/kb/171740 4


Installation, dimensions, and weights (continued)

Notes

- All dimensions ± 0.3 cm. All weights ± 0.9 kg.
- Product ships upright.

SBID-MX275-V2-CPW

Dimensions

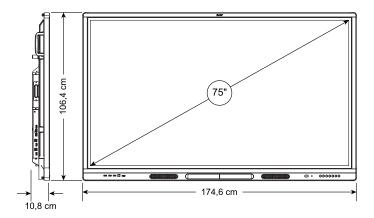

Weight

64.3 kg

Shipping dimensions (including pallet)

190.5 cm × 127.7 cm × 29.5 cm

Shipping weight

87 kg

VESA mount


M8, 600 × 400 mm

Handles

2

SBID-MX286-V2-CPW

Dimensions

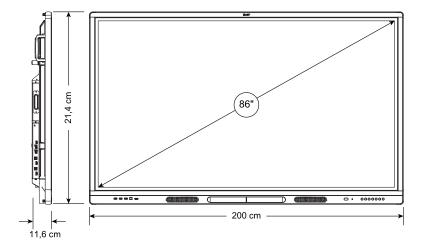

Weight

78.3 kg

Shipping dimensions (including pallet)

216.5 cm × 145.7 cm × 29.5 cm

Shipping weight

109 kg

VESA mount

M8, 700 × 400 mm

Handles

2

smarttech.com/kb/171740 5