Cables included

a Power (country-specific)

b SBX800 CAT5-XT

c ACP control, power and room control

d Stereo

e ACP power

f VGA kit

g SMART GoWire

h USB

j VGA

k DC power

Cables not included

j VGA

m Cat 5

n HDMI

p Cat 5
≤ 50' (15 m)

q RCA kit
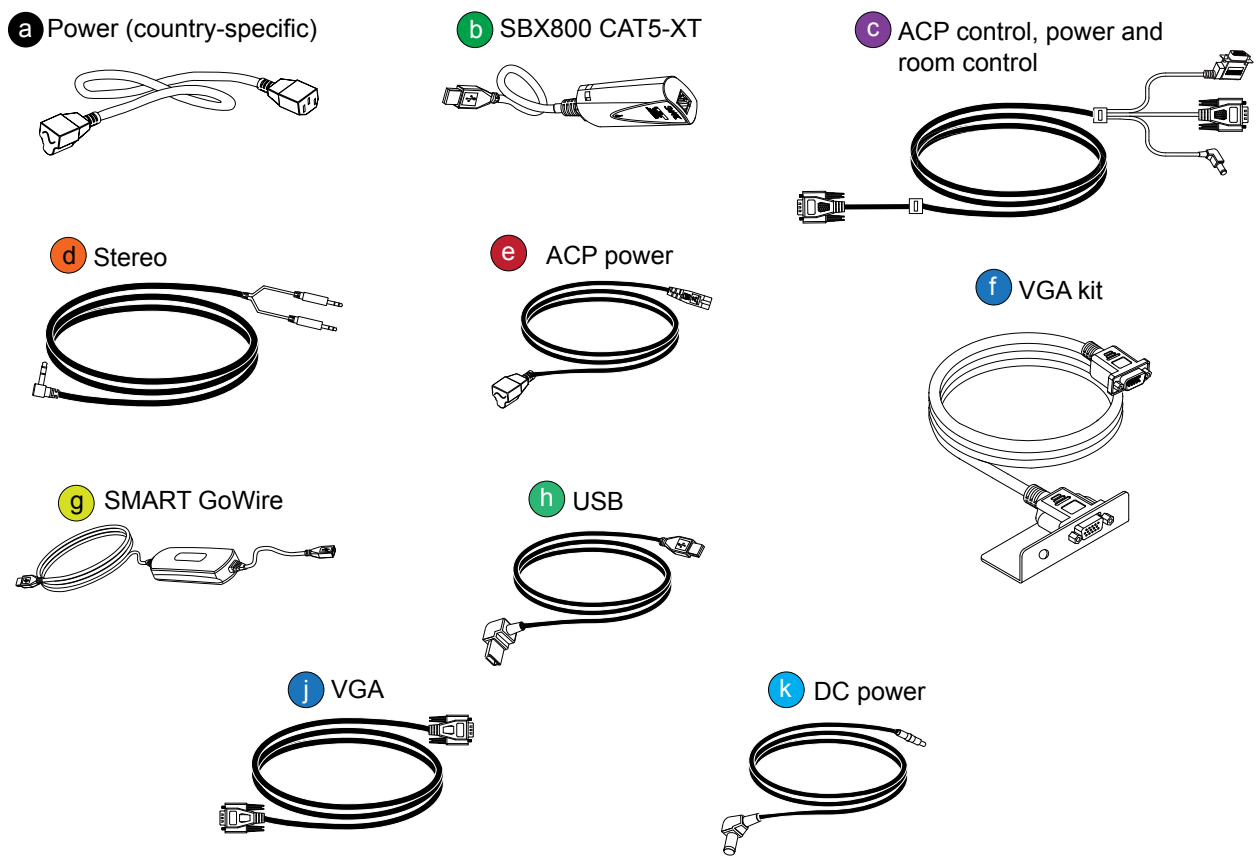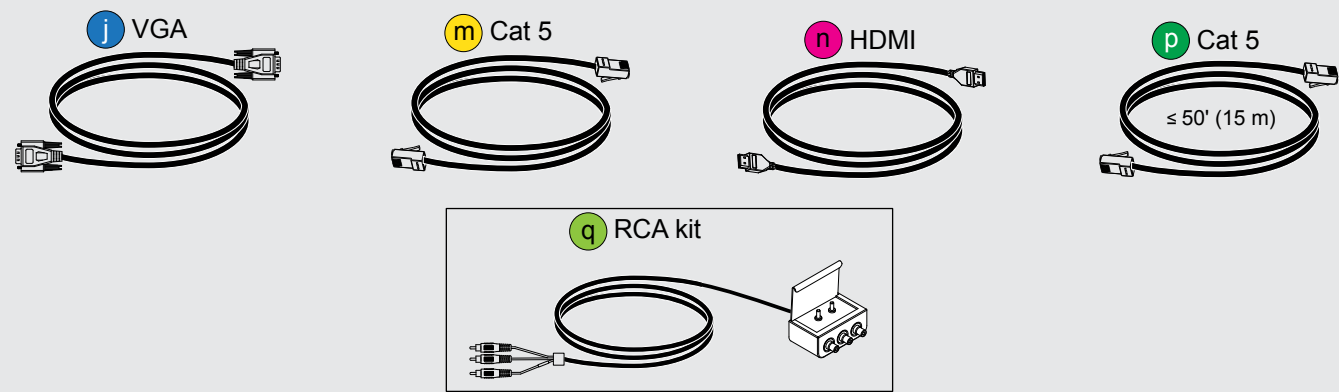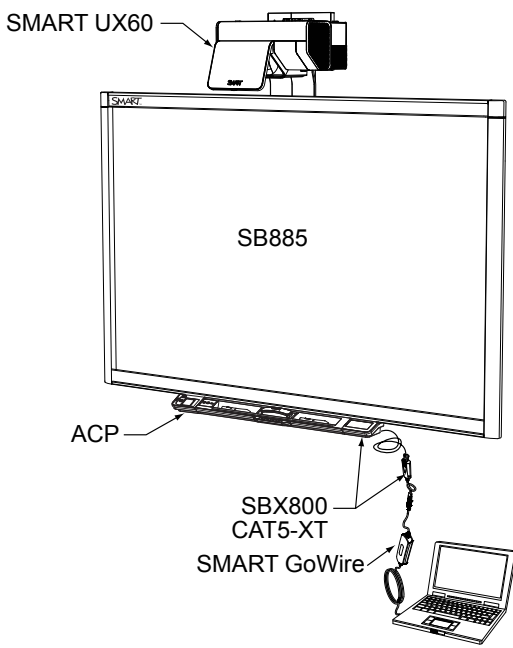
SB885ixe-SMP cabling diagram

Your SMART Board® 885ixe-SMP interactive whiteboard system includes the following:

- an integrated appliance that provides internet browsing, SMART Meeting Pro™ software and PDF and presentation viewing.
- an appliance control panel (ACP) that controls system power, source selection, task selection and volume.
- a SMART GoWire™ auto-launch cable with SMART Meeting Pro software to connect to a guest laptop.
- a VGA connection kit for easy access to a video connection for a guest laptop.
- a USB extender that uses Cat 5 cable to extend your USB connection up to 50' (15 m).

SMART UX60

SB885

ACP

SBX800
CAT5-XT

SMART GoWire

1017947 Rev 01

Cable connections

Guest laptop

VGA — HDMI

either

LAN (optional)

100–240V AC 50–60 Hz

LAN

smarttech.com/kb/157588

smarttech.com/kb/170157

GoWire

SBX800-CAT 5-XT

LAN

SBA-L speakers (optional)

Back view of SB885ixe-SMP

RCA pod (optional)

100–240V AC 50–60 Hz

Aux RS-232
smarttech.com/kb/157587

SBX800 CAT5-XT

Back view of pen tray

ACP

DC 5V 1A

Audio Out

VGA Out

DC 5V 2A

VGA 1

ECP

VGA 2

S-Video

Control

Composite Video

HDMI

100V - 240V 50 Hz - 60 Hz