



## Specifications

# SMART Board® 8065i-G5-SMP-V2 interactive flat panel with optional SMART kapp iQ™ functionality

Model SBID8065i-G5-V2


## Overview

The SMART Board® 8065i-G5-SMP-V2 interactive flat panel combines SMART's proprietary DVIT® (Digital Vision Touch) technology with a premium touch experience and the power of SMART Meeting Pro® software. For simple and powerful digital whiteboarding, this interactive flat panel is also available with SMART kapp iQ™ functionality.

The 4K ultra-high-definition display provides optimal image clarity and wide viewing angles. With the new Pen ID™ feature, you can assign different appearances to the pens and write or draw over any application in digital ink.


Object Awareness allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and two users can write or draw at the same time.

See [smarttech.com](https://smarttech.com) for more information about this product.

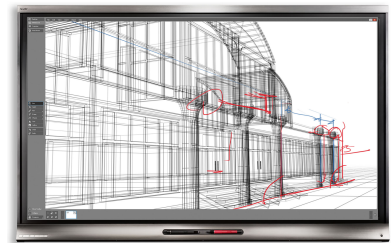

## Dimensions and weights<sup>1</sup>

### Dimensions

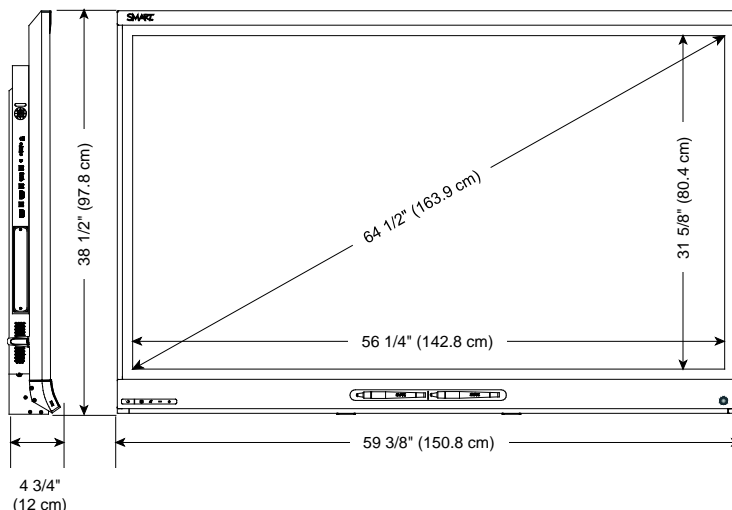

### Weight

134 lb. (60.9 kg)

### Shipping dimensions (including pallet)

69 1/4" × 49 5/8" × 11 7/8"  
(175.8 cm × 126.1 cm × 30.3 cm)

### Shipping weight

181 lb. (82.1 kg)



As an ENERGY STAR® certified signage display, the SMART Board 8065i-G5-SMP-V2 interactive flat panel meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

<sup>1</sup>All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

## Hardware

### Interaction

Touch technology	DViT technology
Multitouch capabilities	8 touches on Windows® computers <sup>2</sup>
Gesture support	Windows 7, Windows 8.1 and Windows 10 operating systems
Object awareness	Behavior adjusts automatically to whatever tool or object is being used, whether it's a pen, finger, eraser or palm.
Pen ID	Two people can write independently and simultaneously, using different colored ink.

### Display

Type	LED
Aspect ratio	16:9
Optimal resolution	3840 × 2160 at 30 Hz (HDMI®) or 60 Hz (DisplayPort)
Horizontal frequency	26.97–75.0 kHz
Vertical frequency	23.9–60.32 Hz
Contrast ratio (typical)	1200:1
Brightness (maximum)	338 cd/m <sup>2</sup>
Pixel pitch	0.372 mm × 0.372 mm
Gamut	68% of NTSC
Viewing angle	178°
Response time (typical)	8 ms



<b>Presence detection</b>	Presence detection sensor on the bottom frame
---------------------------	---

<b>Audio</b>	10 W integrated side-firing speakers (×2)
--------------	---

<b>Noise level</b>	<35 dBA
--------------------	---------

<b>Included cables and accessories</b>	8' (2.4 m) country-specific power cable 16' 5" (5 m) USB cable 20' 8" (6.3 m) HDMI cable CAT 5 USB extender Pen (×2)
--	--

<b>Mounting holes</b>	For a standard VESA® 300 mm × 400 mm mounting plate 13 3/4" (34.9 cm) from the bottom of the interactive flat panel
-----------------------	--

<b>Mounting bracket depth</b>	Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the interactive flat panel to clear the wall
-------------------------------	---

<sup>2</sup>Requires SMART Product Drivers to be installed, and some applications might not support 8 touches

## Connectors

<b>Side</b>	Side connector panel: USB 2.0 Type-B (×3) HDMI 1.4 in (×2) DisplayPort in Stereo 3.5 mm out RS-232 in	Accessory slot: OPS interface supporting HDMI, DisplayPort and USB
<b>Bottom</b>	USB 2.0 Type-A	
<b>Back</b>	AC power inlet	

## Installation requirements

<b>Interactive flat panel</b>	See the <i>SMART Board 8000i-G5-SMP series interactive flat panels administrator's guide</i> ( <a href="http://smarttech.com/kb/170814">smarttech.com/kb/170814</a> )
<b>Room computers and guest laptops</b>	
General requirements	See <a href="http://smarttech.com/SMARTMeetingProReleaseNotes">smarttech.com/SMARTMeetingProReleaseNotes</a>
4K UHD	Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory See <a href="http://kb.smarttech.com/?q=15546">kb.smarttech.com/?q=15546</a>
<b>Mini-computers</b>	
General requirements	See <a href="http://smarttech.com/SMARTMeetingProReleaseNotes">smarttech.com/SMARTMeetingProReleaseNotes</a>
Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern

## Cable requirements

<b>HDMI</b>	HDMI 1.4 compliant or better Maximum length: 23' (7 m) Notes: Use only certified HDMI cables that have been tested to support the performance standard you require. The performance of cables longer than 23' (7 m) is highly dependent on the quality of the cable.
<b>DisplayPort</b>	DisplayPort 1.2 compliant or better Maximum length: 23' (7 m)
<b>USB</b>	Maximum length: 16' (5 m)
<b>Important</b>	Using cables that exceed these maximum lengths may produce unexpected results, degraded picture quality or USB connectivity. Refer to the <i>SMART installation standards</i> ( <a href="http://smarttech.com/kb/171035">smarttech.com/kb/171035</a> ) for a comprehensive guide on cables and extensions for SMART hardware products.

## Storage and operating requirements

<b>Power requirements</b>	100V to 240V AC, 50 Hz to 60 Hz
<b>Power consumption at 77°F (25°C)</b>	
Standby mode	<2.2 W
Normal operating (out-of-box)	110 W
Maximum operating (with accessories)	189 W
<b>Operating temperature</b>	41–95°F (5–35°C)
<b>Storage temperature</b>	-4–140°F (-20–60°C)
<b>Humidity</b>	5–80% relative humidity, non-condensing

## Certification and compliance

<b>Regulatory certification</b>	UL (U.S./Canada), FCC, IC, CE, CCC, EAC, RCM, KC, SPRING, PSE
<b>Environmental compliance</b>	
European Union	REACH, RoHS, WEEE and Packaging
U.S.	Packaging and Conflict Minerals

## Purchasing information

<b>Order number</b>	
SBID8065i-G5-SMP-V2	SMART Board 8065i-G5-SMP-V2 interactive flat panel, including a SMART Meeting Pro software room license and 25 SMART Meeting Pro software personal licenses
<b>Optional accessories</b>	
WM-SBID-501	Fixed wall mount for SMART interactive flat panels
UGK-KAPPIQ-AM30-ENT	SMART kapp iQ for business appliance for SMART Board 8000i-G5 series interactive flat panels
Other	See <a href="https://smarttech.com/businessaccessories">smarttech.com/businessaccessories</a>
<b>Warranty</b>	Three-year limited equipment warranty
<b>SMART advanced support</b>	Designed to limit downtime and optimize return on investment, SMART Support Services provide peace of mind and maximize the performance of your SMART solution. These offerings give you access to expert support, guaranteed response times and advance hardware replacement. Three service offerings are available: Basic, Elite and Platinum. For more information, see <a href="https://smarttech.com/services">smarttech.com/services</a> .

---

[smarttech.com/support](http://smarttech.com/support)  
[smarttech.com/contactsupport](http://smarttech.com/contactsupport)

© 2016 SMART Technologies ULC. All rights reserved. SMART Board, SMART kapp iQ, SMART Meeting Pro, DVIT, Pen ID, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. HDMI and all associated logos are trademarks of HDMI Licensing, LLC. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: [www.smarttech.com/patents](http://www.smarttech.com/patents). Contents are subject to change without notice. 10-2016.