

Specifications SMART Board® interactive whiteboard system Model SB885i6


Overview

Your SMART Board® 885i6 interactive whiteboard system combines the use of a SMART Board 800 series interactive whiteboard and a SMART UF70w projector along with other accessories and optional equipment.

The SMART UF70w projector provides an ultra-bright high resolution image on a short boom delivering high definition, high performance interactivity that is virtually shadow-free and glare-free. You can do everything you can do at your computer—open and close applications, meet with others, create new documents or edit existing ones, visit websites, play and manipulate video clips and more—just by touching the interactive surface. Four users can draw on the interactive surface at the same time, and you can use an array of gestures within applications.


The SB885i6 system supports video and audio from a variety of devices, including DVD and Blu-ray[™] players, document cameras, and other high-definition sources, and is displayed on the interactive screen. All HDMI 1.4 inputs are HDCP compliant.

See smarttech.com for more information on this product.

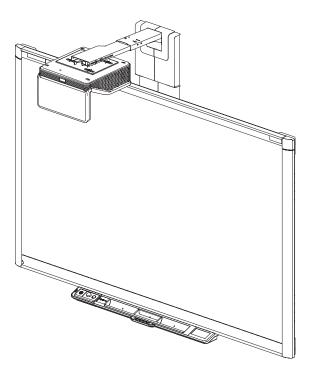

Dimensions and weights¹

Dimensions

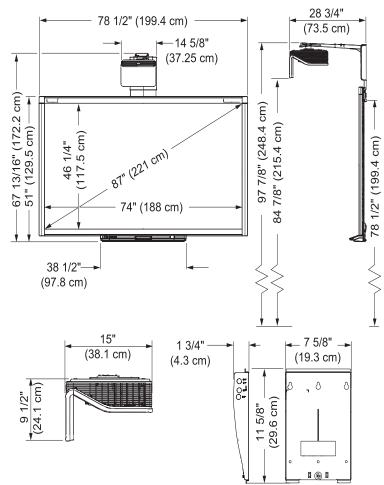

SMART UF70w projector

Weight (projector only)

16 lb. 11 oz (7.6 Kg)

Weight (projector and boom)

28 lb. 6 oz. (12.9 Kg)

Shipping weight

35 lb. 13 oz. (16.2 kg)

Shipping dimensions

20" W × 15 1/2" H × 24" D (50.8 cm × 39.4 cm × 61 cm)

Projector dimensions

14 5/8" W × 9.1/2" H × 28 3/4" D (37.1 cm × 24.1 cm × 73 cm)

SMART Board 885 interactive whiteboard

Weight

60 lb. (27.2 kg)

Shipping dimensions

4 3/8" W × 56 3/4" H × 88" D (11.1 cm × 144.1 cm × 223.5 cm)

Shipping weight

90 lb. (40.8 kg)

Extended control panel (ECP) Dimensions

6 5/8" W × 2 1/8" H × 4 5/8" D (16.8 cm × 5.5 cm × 11.9 cm)

Weight

5 lb 11 oz. (2.6 kg)

Shipping dimensions

16 1/2" W × 14" H × 3" D (41.9 cm × 35.6 cm × 7.6 cm)

Remote control

Dimensions

1 5/8" W × 3 3/8" H × 1/4" D (4.1 cm × 8.6 cm × 0.6 cm)

 1 All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Projector

Brightness (standard)	3000 lumens 230 W mode at a CCT of 6500 K by the IEC method
Brightness (economy)	2250 lumens 190 W mode. at a CCT of 6500 K by the IEC method
Native resolution	WXGA 1280 × 800
Aspect ratio	16:10 with support for 16:9, and 4:3 and 5:4 ratio with scaling
Throw ratio	Short throw 0.35:1 ratio
Throw distance	25.75" (65.5 cm)
Display technology	The projection engine uses DLP® technology by Texas Instruments™, providing BrilliantColor™ performance and quality Gamma 2.2 correction with Bright Room, Dark Room, sRGB, User and SMART Presentation modes.
Lamp life ²	Up to 2500 hours in Standard 230 W mode. Up to 4000 hours in Economy 190 W mode.
Integrated loud speaker	9 W rms
Projector noise	32 dBA standard fan speed. 37 dBA high speed fan speed.
Contrast ratio (typical)	2900:1
Video system	HDTV (720p and 1080p) video system compatibility and HD Ready (HDMI technology and 720p) available, NTSC, NTSC 4:43, PAL, PAL-N, PAL-M and SECAM (480i/p and 576i/p)
compatibility	
Video interface	HDCP compliant HDMI, Composite, VESA® RGB with additional interface support for Component YPbPr and Component YCbCr inputs with the proper adapters (not included)
compatibility	
Horizontal frequency	15 kHz–72 kHz
Vertical frequency	15 Hz–75 Hz
Clock frequency	165 Mhz
External management	Infrared remote control, RS-232 control port, internal web page, Crestron® RoomView® management via Ethernet



Interactive whiteboard

Touch resolution

4000 × 4000

²Lamp life varies depending on the selected mode, environmental factors and projector use. Over time, the lamp's brightness decreases.

SPECIFICATIONS SMART BOARD® INTERACTIVE WHITEBOARD SYSTEM - MODEL SB88516

Touch and gestures	Users can interact with the interactive whiteboard using the included pens or other objects or by using their fingers to write, erase and perform mouse functions. The Object Awareness feature enables you to pick up a pen, and then write, select or erase without replacing the pen. This interactive whiteboard also features gesture capability, providing a natural and flexible way to interact with content.
Digitizing technology	Four-camera DViT $^{\circ}$ (Digital Vision Touch) technology with steel coated dry erase surface
Pen tray	Optical sensors in the pen tray detect when you lift a pen or eraser from the tray. Color buttons on the pen tray enable you to select pen color.
Accessories	Two ergonomic pens with comfort grip and rectangular eraser
Extended Control Panel (ECP)	SB885i6 - included with the system, not pre-attached to the pen tray
Included cables and hardware SB885i6	14' 9" (4.5 m) power cable Infrared remote control 16' 5" (5 m) USB cable 13' 5.5" (4.1 m) 3.5 mm stereo audio cable Projector wiring harness
Theft protection	Projector system padlock ring SB800 system - Kensington security slot
Connectors	
Projector connectors	 3.5 mm phone jack audio input 3.5 mm phone jack audio output DB15F RGB VGA video input (VGA In) DB15F RGB VGA video input (VGA Out) DB9F RS-232 control port HDMI 1.4 input Power (100V-240V AC at 50 Hz-60 Hz) USB-B port (for service use only) RJ45 - Ethernet connector 7-pin mini-DIN for ECP data 4-pin mini-DIN 5V/2A output for ECP USB HUB/switch power RCA analog audio and composite video (red, white and yellow) Microphone 3.5 mm
ECP connectors	RJ11 6-wire internal pen tray connection 11-pin connects to projector wiring harness 4-pin room control system via SB8-CTRL adapter cable USB-B connects to bottom of pen tray USB mini-Type B (x2) primary and secondary computer connections USB Type A for USB Drive or memory stick

Computer requirements

 SB885i6
 Windows® operating system or Mac operating system software and SMART Notebook®

 collaborative learning software installed. For a complete list of computer requirements, go to smarttech.com/downloads and browse to the latest SMART Notebook software release notes applicable to your operating system.

Storage and operating requirements

Power requirements and consumption	100V–240V AC at 50 Hz–60 Hz
Full mode	360 W
ECO mode	360 W
Standby mode	0.5 W
Operating temperature	
Interactive whiteboard	41°F to 95°F (5°C to 35°C) from 0' to 6000' (0 m to 1800 m) 41°F to 86°F (5°C to 30°C) from 6000' to 9800' (1800 m to 3000 m)
Projector	Standard speed: 41°F to 95°F (5°C to 35°C) from 0' to 6000' (0 m to 1800 m) High speed: 41°F to 86°F (5°C to 30°C) from 6000' to 6800' (1800 m to 2100 m)
Storage temperature	-4°F (-20°C) to 122°F (50°C)
Humidity	Up to 80% storage relative humidity, non-condensing Up to 80% operating relative humidity, non-condensing

Certification and compliance

Regulatory certification CB, CCC, CE, C-Tick, FCC, KC, GOST-R, NOM, PSB, PSE, TUV-GS, UL/CSA(U.S./Canada) and VCCI

Environmental compliance

China	EIP
European Union	REACH, RoHS, WEEE, Battery, Packaging and ErP Standby
U.S.	Packaging and Conflict Minerals

Warranty

Interactive whiteboard	Two-year limited equipment warranty OR Five-year limited equipment warranty upon registration
Projector	Three-year limited equipment warranty
Projector lamp	1000-hour/one-year warranty
ECP	Three-year limited equipment warranty

SPECIFICATIONS SMART BOARD® INTERACTIVE WHITEBOARD SYSTEM – MODEL SB88516

Purchasing information

Order numbers

SB885i6	87" (221 cm) diagonal SMART Board interactive whiteboard with a SMART UF70w projector system. Includes a SMART Notebook software installation DVD.	
1020991	Replacement lamp for SMART UF70 / UF70w projectors.	
1013576	Projector hardware kit (see smarttech.com/kb/160505)	
Optional extended warranty		
(EWY1-UF70W)	SMART UF70w projector one-year warranty extension. (available at time of projector purchase only)	
(EWY2-UF70W)	SMART UF70w projector two-year warranty extension. (available at time of projector purchase only)	
Optional accessories	See smarttech.com/accessories	

smarttech.com/support

smarttech.com/contactsupport

© 2013–2015 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 07/2015.